

POWERING UP OFFSHORE SOUTH COAST

Subsea Noise Technical Report

IE001220-RPS-RP-XX-RP-
EN-0005
A1 C02
27 January 2025

Subsea Noise Technical Report

Document status

Version	Purpose of document	Authored by	Reviewed by	Approved by	Review date
S1 P01	Draft for Internal Review	RSP/SM	JM	GMcE	23/09/2024
S3 P01	Draft for Client Review	RSP/SM	JM	GMcE	04/10/2024
S3 P03	Client Comments	RSP/SM	JM	GMcE	23/10/2024
A1 C01	Final	RSP/SM	JM	GMcE	23/10/2024
A1 C02	Updated area	RSP/SM	JM	GMcE	27/01/2025

Approval for issue

GMcE

27 January 2025

© Copyright R P S Group Limited. All rights reserved.

The report has been prepared for the exclusive use of our client and unless otherwise agreed in writing by R P S Group Limited no other party may use, make use of or rely on the contents of this report.

The report has been compiled using the resources agreed with the client and in accordance with the scope of work agreed with the client. No liability is accepted by R P S Group Limited for any use of this report, other than the purpose for which it was prepared.

R P S Group Limited accepts no responsibility for any documents or information supplied to R P S Group Limited by others and no legal liability arising from the use by others of opinions or data contained in this report. It is expressly stated that no independent verification of any documents or information supplied by others has been made.

R P S Group Limited has used reasonable skill, care and diligence in compiling this report and no warranty is provided as to the report's accuracy.

No part of this report may be copied or reproduced, by any means, without the written permission of R P S Group Limited.

Prepared by:

RPS

Prepared for:

EirGrid

Dublin | Cork | Galway | Sligo | Kilkenny
rpsgroup.com

RPS Group Limited, registered in Ireland No. 91911
RPS Consulting Engineers Limited, registered in Ireland No. 161581
RPS Engineering Services Limited, registered in Ireland No. 99795
The Registered office of each of the above companies is West Pier
Business Campus, Dun Laoghaire, Co. Dublin, A96 N6T7



Contents

	Glossary	vii
	Acronyms.....	viii
	Units	ix
1	INTRODUCTION	1
1.1	Statement of Authority.....	1
2	ASSESSMENT CRITERIA.....	2
2.1	General.....	2
2.2	Effects on Marine Animals	3
2.2.1	Irish Guidance Interpretation	3
2.3	Thresholds for Marine mammals.....	4
2.4	Disturbance to Marine Mammals	5
2.5	Injury and Disturbance to Fishes.....	6
3	THE SITE ENVIRONMENT.....	9
3.1	SI Works Area of Interest	9
3.2	Water Properties	9
3.3	Sediment Properties.....	9
4	SOURCE NOISE LEVELS	11
4.1	Source Models	11
4.1.1	Equipment.....	14
4.1.2	Combined Sources	23
5	SOUND PROPAGATION MODELLING METHODOLOGY	29
5.1	Modelling Assumptions	29
5.2	Exposure Calculations (dB SEL)	29
6	RESULTS AND ASSESSMENT	31
6.1	Assumptions and Notes on Results	31
6.2	Results – Tabulated	32
6.2.1	Geophysical Survey	32
6.2.2	Geotechnical Survey.....	37
6.2.3	ADCP	38
6.3	Results Summary	39
6.3.1	Geophysical Survey	39
6.3.2	Geotechnical Survey.....	40
6.3.3	ADCP	40
7	CONCLUSIONS.....	42
8	REFERENCES.....	43
	APPENDIX A – ACOUSTIC CONCEPTS AND TERMINOLOGY	46
	Impulsiveness.....	48
	Review of Sound Propagation Concepts	51

Subsea Noise Technical Report

Tables

Table 2-1: AUD INJ and TTS onset acoustic thresholds (Southall <i>et al.</i> , 2019; Tables 6 and 7)	5
Table 2-2: Disturbance Criteria for Marine Mammals Used in this Study based on Level B harassment of NMFS (National Marine Fisheries Service, 2005).....	6
Table 2-3: Criteria for onset of injury to fish and sea turtles due to impulsive noise. For this assessment the lowest threshold for any group is used for all groups (shown in bold).....	7
Table 2-4: Criteria for fish (incl. sharks) due to non-impulsive noise from Popper et al. 2014, table 7.7.....	8
Table 3-1: Sediment Properties for the two survey areas.	10
Table 4-1: Summary of Sound Sources and Activities Included in the Subsea Noise Assessment	12
Table 5-1: Swim speed examples from literature	30
Table 6-1. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (Parametric SBP).....	33
Table 6-2: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (Parametric SBP).....	33
Table 6-3: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (Parametric SBP).....	33
Table 6-4. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).	34
Table 6-5: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).	34
Table 6-6: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).	34
Table 6-7. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).....	35
Table 6-8: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).....	35
Table 6-9: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).....	36
Table 6-10. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (boomer SBP).	36
Table 6-11: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (boomer SBP).....	36
Table 6-12: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (boomer SBP).	37
Table 6-13. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during the geotechnical survey.	37
Table 6-14: Risk ranges for exceeding the TTS threshold for all hearing groups during the geotechnical survey.	38
Table 6-15: Risk ranges for exceeding the behavioural threshold for all hearing groups during the geotechnical survey.	38
Table 6-16. Risk ranges for exceeding the AUD INJ threshold for all hearing groups of the ADCP.....	38
Table 6-17: Risk ranges for exceeding the TTS threshold for all hearing groups of the ADCP.....	39
Table 6-18: Risk ranges for exceeding the behavioural threshold for all hearing groups of the ADCP.	39
Table 9-1: Comparing sound quantities between air and water.	46

Figures

Figure 2-1: Auditory weighting functions for seals, whales and sirenians (National Oceanic and Atmospheric Administration, 2024). Older weightings in dotted lines for comparison.	5
Figure 2-2 Generalised hearing thresholds for fishes grouped by the presence of a swim bladder and its role in hearing.	6
Figure 3-1: MUL Area of Interest and Proposed SI works locations along offshore transmission cable corridors and landfall zones	9
Figure 4-1. Example of recorded levels from an echosounder showing significant energy outside the nominal frequencies, necessitating assessment at those frequencies too (Burnham, et al., 2022).	12
Figure 4-2. Vessel source band levels. Broadband level: 160 dB SPL. Based on generic small survey craft, c. 15 m length travelling at 4 kn.	14
Figure 4-3. Vessel source band levels. Broadband level: 176 dB SPL. Based on generic larger survey craft, c. 75 m length travelling <9 kn.	15
Figure 4-4. Vessel source band levels. Broadband level: 183 dB SPL. Based on generic larger survey craft, with an active DP system, c. 75 m length travelling <9 kn.	15
Figure 4-5. MBES source band levels as equivalent spherical/omnidirectional levels.	16
Figure 4-6. SSS source band levels as equivalent spherical/omnidirectional levels.	17
Figure 4-7. USBL source band levels.	17
Figure 4-8. Parametric SBP source band levels as equivalent spherical/omnidirectional levels. Primary frequencies 85 kHz – 115 kHz, secondary frequencies 2 kHz – 22 kHz.	18
Figure 4-9. Chirper/Pinger type SBP band levels.	19
Figure 4-10. Sparker type SBP (UHS) band levels.	19
Figure 4-11. Example of an impulse from a sparker type SBP.	20
Figure 4-12. Boomer type SBP band levels.	20
Figure 4-13. Example of an impulse as recorded from a boomer type SBP.	21
Figure 4-14. Band levels for borehole drilling, Levels above 25 kHz are extrapolated based on trend in bands at lower frequencies.	21
Figure 4-15. Band levels vibro-coring and CPT. Levels above 25 kHz are extrapolated based on trend in bands at lower frequencies.	22
Figure 4-16. Band levels for a generic ADCP suitable for the depths of this survey. Also shown are the weighting curve for the VHF group (dotted, right axis) and the ADCP source band levels weighted for the VHF group (purple).	22
Figure 4-17. Source band level during geophysical survey (parametric SBP).	23
Figure 4-18. Source band level during geophysical survey (chirper/pinger SBP).	24
Figure 4-19. Source band level during geophysical survey (sparker SBP).	25
Figure 4-20. Source band level during geophysical survey (boomer SBP).	26
Figure 4-21. Source band level during geophysical survey soft start. Offshore vessel shown.	27
Figure 4-22. Source band level during geotechnical survey.	27
Figure 4-23. Source band level during geotechnical survey soft start.	28
Figure 4-24. Source band level of ADCP (green) and for the ADCP when weighted for the VHF hearing group (blue).	28
Figure 9-1: Graphical representation of acoustic wave descriptors.	47
Figure 9-2: Comparison between hearing thresholds of different marine animals and humans.	48
Figure 9-3. Example of a multibeam echosounder at 15 m depth (achieving 50 ping/sec) with a 3 ms ping duration. VHF-weighted kurtosis of 16 – non-impulsive.	49
Figure 9-4. Example of a multibeam echosounder at 250 m depth (achieving 3 ping/sec) with a 10 ms ping duration. VHF-weighted kurtosis of 80 – impulsive.	50
Figure 9-5. Example of USBL signal kurtosis decreasing with range at 20 m depth. Multiple lines are various combinations of source and receiver depths.	51
Figure 9-6. Example of USBL signal kurtosis decreasing with range at 200 m depth. Multiple lines are various combinations of source and receiver depths.	51

Subsea Noise Technical Report

Figure 9-7: Schematic of the effect of sediment on sources with narrow beams. Sediments range from fine silt (top panel), sand (middle panel), and gravel (lower panel).	53
Figure 9-8: Example of a beam pattern on an Innomar SES 2000. Primary frequencies left (f1 & f2), the interference pattern between the primary frequencies means that the beam pattern for the secondary frequency (right plot) is very narrow (Source: Innomar technical note TN-01).	53
Figure 9-9: Lower cut-off frequency as a function of depth for a range of seabed types.	54
Figure 9-10: Soundspeed profile as a function of salinity, temperature and pressure.	54
Figure 9-11: Effect of wind (at 10 m height) on upper portion of soundspeed profile.	55
Figure 9-12: Absorption loss coefficient (dB/km) for various salinities and temperature.	55

Glossary

Term	Meaning
Decibel (dB)	A relative scale most commonly used for reporting levels of sound. The actual sound measurement is compared to a fixed reference level and the "decibel" value is defined to be $10 \cdot \log_{10}(\text{"actual"/"reference"})$, where ("actual"/"reference") is a power ratio. The standard reference for underwater sound pressure is 1 micro-Pascal (μPa), while 20 micro-Pascals is the standard for airborne sound. The dB symbol is often followed by a second symbol identifying the specific reference value (i.e. re 1 μPa).
Grazing angle	A glancing angle of incidence (the angle between a ray incident on a surface and the line perpendicular to the surface).
Auditory Injury (AUD INJ)	A total or partial permanent loss of hearing caused by some kind of acoustic trauma. AUD INJ results in irreversible damage to the sensory hair cells of the ear and thus, a permanent reduction of hearing acuity.
Temporary Threshold Shift (TTS)	Temporary loss of hearing as a result of exposure to sound over time. Exposure to high levels of sound over relatively short time periods will cause the same amount of TTS as exposure to lower levels of sound over longer time periods. The mechanisms underlying TTS are not well understood, but there may be some temporary damage to the sensory cells. The duration of TTS varies depending on the nature of the stimulus, but there is generally recovery of full hearing over time.
Sound Exposure Level (SEL)	The cumulative sound energy in an event, formally: "ten times the base-ten logarithm of the integral of the squared pressures divided by the reference pressure squared". Equal to the often seen " L_E " or "dB SEL" quantity. Defined in: ISO 18405:2017, 3.2.1.5
Sound Pressure level (SPL)	The average sound energy over a specified period of time, formally: "ten times the base-ten logarithm of the arithmetic mean of the squared pressures divided by the squared reference pressure". Equal to the deprecated "RMS level", " dB_{rms} " and to L_{eq} if the period is equal to the whole duration of an event. Defined in ISO 18405:2017, 3.2.1.1
Peak Level, Peak Pressure Level (L_P)	The maximal sound pressure level of an event, formally: "ten times the base-ten logarithm of the maximal squared pressure divided by the reference pressure squared" or "twenty times the base-ten logarithm of the peak sound pressure divided by the reference pressure, where the peak sound pressure is the maximal deviation from ambient pressure". Defined in ISO 18405:2017, 3.2.2.1
Source Level (SL)	Taken here to mean the level (SEL/SPL/ L_P) at 1 meter range. If not otherwise stated, it is assumed the source is omnidirectional (equal level in all directions). For sources larger than 1 m in radius, the Source Level is back-calculated to 1 m.
Decidecade	Used to refer to a step in frequency, similar to "one-third-octave", defined as a ratio of $10^{0.1} \approx 1.259$ (one third octave is $21/3 \approx 1.260$). Used interchangeably with "3 rd octave".
Noise	Sound that is irrelevant, unwanted or harmful to the organism(s) in question. Noise is often detrimental, but not necessarily so.
Kurtosis	A statistical measure of "peakedness" of a distribution (of e.g. pressure values in a sound pulse). Defined in ISO 5479:1997

Subsea Noise Technical Report

Acronyms

Term	Meaning
ADD	Acoustic Deterrent Device
ADCP	Acoustic Doppler Current Profiler
LF	Low Frequency (Cetaceans)
HF	High Frequency (Cetaceans)
VHF	Very High Frequency (Cetaceans)
MF	Mid Frequency (Cetaceans) – DEPRECATED only for reference to NOAA/NMFS 2018 groups
OW/OCW	Otariid pinnipeds/Other Carnivores in water (refers to the same weighting and animal groups)
PW/PCW	Phocid pinnipeds
NMFS	National Marine Fisheries Service
RMS	Root Mean Square
SEL	Sound Exposure Level, [dB]
SPL	Sound Pressure Level, [dB]
L _p	Peak Pressure Level, [dB]
SL	Source Level [dB]
TTS	Temporary Threshold Shift
PTS	Permanent Threshold Shift – DEPRECATED , see “AUD INJ”
AUD INJ	Auditory Injury (synonymous with deprecated “PTS”)
SSS	Side Scan Sonar – Towed sonar device typically positioned 10-15 m above the sediment. Its main purpose is to characterise the sediment surface texture.
MBES	Multibeam Echosounder – Uses multiple narrow beams to measure the depth across a swath below the vessel.
SBP	Sub-Bottom Profiler – Any device/system that uses acoustics to record echoes from within the sediment. Examples include seismic arrays, sparkers, boomers, chirpers, pingers and associated recorder array.
USBL	Ultra Short Baseline Array – Small array of at least 4 hydrophones and a pinger to measure positions of equipment under water.
UHRs	Ultra High-Resolution Seismic survey – Usually a sparker driven sub-bottom characterisation system.
c.	Circa, i.e., approximately
CPT	Cone Penetration Testing – insertion/pushing of rod with standardised, cone-shaped front into sediment to measure various characteristics of the sediment.

Subsea Noise Technical Report

Units

Unit	Description
dB	Decibel (Sound)
Hz	Hertz (Frequency)
kHz	Kilohertz (Frequency)
kJ	Kilojoule (Energy)
km	Kilometre (Distance)
km ²	Kilometre squared (Area)
m	Metre
ms	Millisecond (10 ⁻³ seconds) (Time)
ms ⁻¹ or m/s	Metres per second (Velocity or speed)
kn	Knots (speed), 1 kn = 0.514 m/s, 1 m/s = 1.944 kn
μPa	Micro Pascal
Pa	Pascal (Pressure: newton/m ²)
psu	Practical Salinity Units (parts per thousand of equivalent salt in seawater, weight-based)
kg/m ³	Specific density (of water, sediment or air)
Z	Acoustic impedance [kg/(m ² ·s) or (Pa·s)/m ³]

Units will generally be enclosed in square brackets e.g.: "[m/s]"

1 INTRODUCTION

This Subsea Noise Technical Report presents the results of a desktop study considering the potential effects of underwater noise on the marine environment from the proposed site investigation works (the “SI Works”), in particular those elements of the SI works consisting of marine geophysical and marine geotechnical surveys off the south coast of Ireland from the High Water Mark (HWM) out into the North Celtic Sea. The other surveys to be undertaken as part of the SI Works, have not been modelled as they will either not result in underwater noise or will not have any appreciable effect on receptors, e.g. marine mammals. The aim of the SI Works is to acquire data to a high quality and specification for the Area of Interest (Aoi) which is the area subject to the Maritime Usage Licence (MUL) application. The total Aoi encompasses 2,336 km².

The assessment presented in this Subsea Noise Technical Report is based on the entire Aoi.

The sediment within the Aoi survey area is fine sand to fine gravel and water properties in the area are relatively stable given the lack of major river outflows and a modest tidal range (especially when considered in relation to the overall water depth).

Geophysical and geotechnical surveys such as those proposed for the SI Works use equipment that generate loud and potentially injurious noise to marine life, and as sound is readily transmitted in the underwater environment there is potential for the sound emissions to adversely affect marine life such as marine mammals or fish. At close ranges from a noise source with high noise levels, permanent or temporary hearing damage may occur to marine species, while at a very close range, gross physical trauma is possible. At long ranges (several kilometres) the introduction of any additional noise could for the duration of the activity, potentially cause behavioural changes. For example, changing the ability of species to communicate and to determine the presence of predators, food, underwater features and obstructions.

This report provides an overview of the potential effects due to underwater noise from the SI Works within the Aoi on the surrounding marine environment based on the Southall et al. 2019, NOAA 2024 and Popper et al. 2014 frameworks for assessing impact from noise on marine mammals and fish.

Consequently, the primary purpose of the underwater noise assessment is to predict the likely range of onset for potential physiological and behavioural effects due to increased anthropogenic noise as a result of the SI Works.

1.1 Statement of Authority

██████████ is a Senior Project Scientist with RPS. He holds a master's degree in biology, biosonar and marine mammal hearing from University of Southern Denmark. ██████████ has over 11 years' experience as a marine biologist and over 9 years' experience with underwater noise modelling and marine noise impact assessments. ██████████ has co-developed commercially available underwater noise modelling software, as well developed multiple source models for e.g. impact piling, seismic airgun arrays and sonars.

██████████ is an Associate in Acoustics with RPS. He holds a BA BAI in Mechanical Engineering from Trinity College Dublin (2004) and a PhD in Acoustics and Vibration from Trinity College Dublin (2008). He is a Chartered Engineer with Engineers Ireland. ██████████ has 20 years' experience in environmental projects including planning applications and environmental impact assessments for a wide range of strategic infrastructure projects.

██████████ is Technical Director in the Environmental Services Business Unit in RPS. He has over 24 years' experience. He holds an honours degree in Civil Engineering (B.E.) from NUI, Galway, a postgraduate diploma in Environmental Sustainability from NUI, Galway, and a Master's in Business Studies from the Irish Management Institute/ UCC. ██████████ is also a Chartered Engineer and Project Management Professional with the Project Management Institute (PMI-PMP). He has managed the delivery of numerous environmental projects including marine and terrestrial projects that have required environmental impact assessment, appropriate assessment, and Annex IV species reports.

2 ASSESSMENT CRITERIA

2.1 General

To determine the potential spatial range of injury and disturbance, assessment criteria have been developed based on a review of available evidence including national and international guidance and scientific literature. The following sections summarise the relevant assessment criteria and describe the evidence base used to derive them.

Underwater noise has the potential to affect marine life in different ways depending on its noise level and characteristics. Assessment criteria generally separate sound into two distinct types, as follows:

- **Impulsive sounds** which are typically transient, momentary (less than one second), broadband, and consist of high peak sound pressure with rapid rise time and rapid decay (ANSI, 2005; ANSI, 1986; NIOSH, 1998). This category includes sound sources such as seismic surveys, impact piling and underwater explosions. Additionally included here are sounds under 1 second in duration with a weighted kurtosis over 40 (see note below*).
- **Non-impulsive** (and continuous) sounds which can be broadband, narrowband or tonal, momentary, brief or prolonged, continuous or intermittent and typically do not have a high peak sound pressure with rapid rise/decay time that impulsive sounds do (ANSI, 1995; NIOSH, 1998). This category includes sound sources such as continuous vibro-piling, running machinery, some sonar equipment and vessels. Additionally included here are sounds over 1 second in duration with a weighted kurtosis under 40 (see note below*).

* Note that the European Guidance: “Monitoring Guidance for Underwater Noise in European Seas, Part II: Monitoring Guidance Specifications” (MSFD Technical Subgroup on Underwater Noise, 2014) includes sonar as impulsive sources (see Section 2.2). However, the guidance suggests that “*all loud sounds of duration less than 10 seconds should be included*” as impulsive.

This contradicts research on impact from impulsive sounds suggesting that a limit for “impulsiveness” can be set at a kurtosis¹ of 40 (Martin, et al., 2020). See examples in Appendix A, Impulsiveness.

This latter criterion has been used for classification of impulsive versus non-impulsive for sonars and similar sources. The justification for departing from the MSFD criterion is that the Southall et al. 2019 and the Popper et al. 2014 framework limits are based on the narrower definition of impulsive as given in “Impulsive sounds” above.

There is scope for some sounds to be classified as both impulsive and non-impulsive, depending on the criteria applied. Examples are pulses from sonar-like sources that can contain very rapid rise times (<0.5 ms), sweep a large frequency range and have high kurtosis. However, given that the scientific work carried out to identify impulsive thresholds were done with “pure” impulses (from a near instantaneous event), sonar-like sounds are sometimes not included in this, impulsive, category. This argument ignores that sounds used for establishing the non-impulsive thresholds (often narrowband slowly² rising pulses), are markedly less impulsive (lower kurtosis, narrower bandwidth) than what is sometimes seen in pulses from sonar-like sources and are thus also not representative for all sonar-like pulses.

Given impulsive sound’s tendency to become less impulsive with increased range, a minimal range can be established where the noise is no longer impulsive (here kurtosis <40 is used) (Appendix A, Impulsiveness). This range is established using raytracing, but as the effect varies with exact depth and range of source and receiver, the transition range to non-impulsive used for exposure modelling is doubled from the modelled range where kurtosis goes below 40.

The acoustic assessment criteria for marine mammals and fish in this report has followed the latest international guidance (based on the best available scientific information), that are widely accepted for assessments in the UK, Europe and worldwide (Southall, et al., 2019; Popper, et al., 2014; National Oceanic and Atmospheric Administration, 2024).

¹ Statistical measure of the asymmetry of a probability distribution.

² Slowly in this context is >10 ms – slow relative to the integration time of the auditory system of marine mammals.

2.2 Effects on Marine Animals

Underwater noise has the potential to affect marine life in different ways depending on its noise level and characteristics. Richardson *et al.* (1995) defined four zones of noise influence which vary with distance from the source and level, to which an additional zone has been added “zone of temporary hearing loss”. These are:

- **The zone of audibility:** This is defined as the area within which the animal can detect the sound. Audibility itself does not implicitly mean that the sound will affect the animal.
- **The zone of masking:** This is defined as the area within which sound can interfere with the detection of other sounds such as communication or echolocation clicks. This zone is very hard to estimate due to a paucity of data relating to how animals detect sound in relation to masking levels (for example, humans can hear tones well below the numeric value of the overall sound level). Continuous sounds will generally have a greater masking potential than intermittent sound due to the latter providing some relative quiet between sounds. Masking only occurs if there is near-overlap in sound and signal, such that a loud sound at e.g., 1000 Hz will not be able to mask a signal at 10,000 Hz³.
- **The zone of responsiveness:** This is defined as the area within which the animal responds either behaviourally or physiologically. The zone of responsiveness is usually smaller than the zone of audibility because, as stated previously, audibility does not necessarily evoke a reaction. For most species there is very little data on response, but for species like harbour porpoise there exists several studies showing a relationship between received level and probability of response (Graham IM, 2019; Sarnocińska J, 2020; BOOTH, 2017; Benhemma-Le Gall A, 2021). This zone is quantified here with the use of behavioural thresholds (Table 2-2 & Table 2-3).
- **The zone of temporary hearing loss:** The area where the sound level is sufficient to cause the auditory system to lose sensitivity temporarily, causing loss of “acoustic habitat”: the volume of water that can be sensed acoustically by the animal. This hearing loss is typically classified as Temporary Threshold Shift (“TTS”, see section 2.3 & 2.5).
- **The zone of injury / permanent hearing loss:** This is the area where the sound level is sufficient to cause permanent hearing loss in an animal. This hearing loss is typically classified as Auditory Injury (“AUD INJ”, see section 2.3 & 2.5). At even closer ranges, and for very high intensity sound sources (e.g., underwater explosions), physical trauma or acute mortal injuries are possible.

For this study, it is the zones of injury (“AUD INJ”) that are of primary interest, along with estimates of behavioural impact ranges. To determine the potential spatial range of injury and behavioural change, a review has been undertaken of available evidence, including international guidance and scientific literature. The following sections summarise the relevant thresholds for onset of effects and describe the evidence base used to derive them.

2.2.1 Irish Guidance Interpretation

We note that the DAHG “Guidance to Manage the Risk to Marine Mammals from Man-made Sound Sources in Irish Waters” 2014 (Department of Arts, Heritage and the Gaeltacht, 2014) contains the following statement:

“It is therefore considered that anthropogenic sound sources with the potential to induce TTS in a receiving marine mammal contain the potential for both (a) disturbance, and (b) injury to the animal.”

This states that TTS constitutes an injury and should thus be the main assessment criteria⁴. However, the guidance goes on to specify the use of thresholds from a 2007 publication (Brandon L. Southall, 2007) which has since been superseded (Southall, et al., 2019; National Oceanic and Atmospheric Administration, 2024)

³ The exact limit of how near a noise can get to the signal in frequency before causing masking will depend on the receivers’ auditory frequency resolution ability, but for most practical applications noise and signal frequencies will need to be within 1/3rd octave to start to have a masking effect.

⁴ Injury being the qualifying limit in the Irish Wildlife Act 1976, section 23, 5c :
<https://www.irishstatutebook.ie/eli/1976/act/39/enacted/en/print#sec23>

Subsea Noise Technical Report

and no longer represents best available science, nor reflects best practice internationally. Thus, the following excerpt from the guidance is relevant:

“The document will be subject to periodic review to allow its efficacy to be reassessed, to consider new scientific findings and incorporate further developments in best practice.”

As there has been no such update to date, but the guidance clearly states its intention to consider new scientific findings, we have applied the latest guidance (National Oceanic and Atmospheric Administration, 2024), reflecting the current best available method for assessing impact from noise on marine mammals. This means that it is “AUD INJ” (previously “PTS”) that is the criteria for injury, not “TTS”.

2.3 Thresholds for Marine mammals

The zone of injury in this study is classified as the distance over which a fleeing marine mammal can suffer AUD INJ leading to non-reversible auditory injury. Injury thresholds are based on a dual criteria approach using both un-weighted L_P (maximal instantaneous SPL) and marine mammal hearing weighted SEL. The hearing weighting function is designed to represent the sensitivity for each group within which acoustic exposures can have auditory effects. The categories include:

- **Low Frequency (LF) cetaceans:** Marine mammal species such as baleen whales (e.g. minke whale *Balaenoptera acutorostrata*).
- **High Frequency (HF) cetaceans:** Marine mammal species such as dolphins, toothed whales, beaked whales and bottlenose whales (e.g., bottlenose dolphin *Tursiops truncatus* and white-beaked dolphin *Lagenorhynchus albirostris*).
- **Very High Frequency (VHF) cetaceans:** Marine mammal species such as true porpoises, river dolphins and pygmy/dwarf sperm whales and some oceanic dolphins, generally with auditory centre frequencies above 100 kHz) (e.g., harbour porpoise *Phocoena phocoena*).
- **Phocid Carnivores in Water (PCW):** True seals, earless seals (e.g., harbour seal *Phoca vitulina* and grey seal *Halichoreus grypus*);
- **Other Marine Carnivores in Water (OCW):** Including otariid pinnipeds (e.g., sea lions and fur seals), sea otters and polar bears.
- **Sirenians (SI):** Manatees and dugongs. This group is only represented in the NOAA guidelines.

These weightings are used in this study and are shown in Figure 2-1. It should be noted that not all of the above hearing groups of marine mammals will be present in the SI Works Aol, but all hearing groups are presented in this report for completeness.

2024 Update to Guidance

There has been a recent update to the NOAA 2018 guidelines, with NOAA publishing their final draft of their revision of the NOAA 2018, the Southall et al. 2019 and a large review by the US Navy, published February 2024 (Finneran, 2024). This revision, although in draft is being implemented in the US and represents an increase in scientific understanding of the frequency specific noise levels (peak and exposure) that likely lead to TTS and auditory injury.

Generally, weightings have been modified (Figure 2-1) to include more low-frequency content (especially for the HF group), along with an increase in the threshold values for HF and VHF, but a decrease for PW and OW groups. The steepness of the weightings at high frequencies has increased so frequencies above region of best hearing are now excluded more effectively.

The nomenclature has changed too, while the use of “TTS” remains unchanged to refer to temporary threshold shift, the use of “PTS” (permanent threshold shift) has stopped, with the shorthand “AUD INJ” taking its place (Auditory Injury), to highlight the severity of the effect.

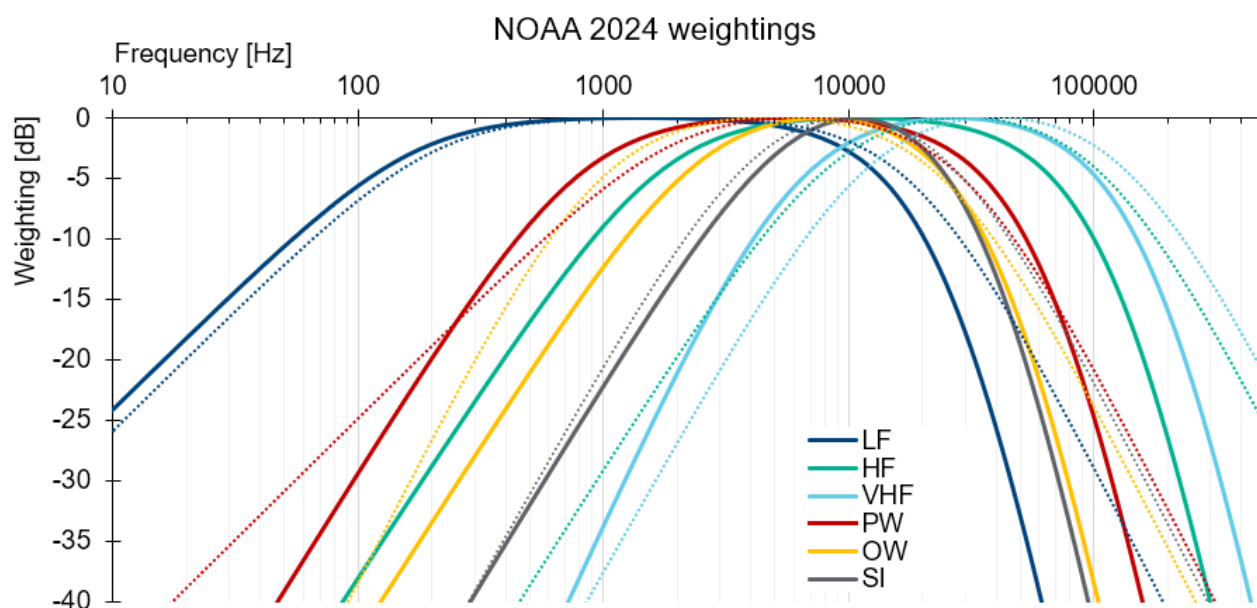


Figure 2-1: Auditory weighting functions for seals, whales and sirenians (National Oceanic and Atmospheric Administration, 2024). Older weightings in dotted lines for comparison.

Both the criteria for impulsive and non-impulsive sound are relevant for this study given the nature of the sound sources used during the SI Works. The relevant AUD INJ and TTS criteria proposed by NOAA 2024 are summarised in Table 2-1.

Table 2-1: AUD INJ and TTS onset acoustic thresholds (Southall *et al.*, 2019; Tables 6 and 7)

Hearing Group	Parameter	Impulsive [dB]		Non-impulsive [dB]	
		AUD INJ	TTS	AUD INJ	TTS
Low frequency (LF) cetaceans	LP, (unweighted)	222	216	-	-
	SEL, (LF weighted)	183	168	197	177
High frequency (HF) cetaceans	LP, (unweighted)	230	224	-	-
	SEL, (MF weighted)	193	178	201	181
Very high frequency (VHF) cetaceans	LP, (unweighted)	202	196	-	-
	SEL, (HF weighted)	159	144	181	161
Phocid carnivores in water (PCW)	LP, (unweighted)	223	217	-	-
	SEL, (PW weighted)	183	168	195	175
Other marine carnivores in water (OCW)	LP, (unweighted)	230	224	-	-
	SEL, (OW weighted)	185	170	199	179
Sirenians (SI) (NOAA only)	LP, (unweighted)	225	219	-	-
	SEL, (OW weighted)	186	171	186	180

2.4 Disturbance to Marine Mammals

Disturbance thresholds for marine mammals are summarised in Table 2-2. Note that the non-impulsive threshold can often be lower than ambient noise for coastal waters with some human activity, meaning that ranges determined using this limit will tend to be higher than actual ranges. However, the levels are unweighted and ranges to threshold will be dominated by low-frequency sound, which for most hearing

Subsea Noise Technical Report

groups is outside their hearing range. For hearing groups with low thresholds this can mean that their range to TTS/AUD INJ is *larger* than the range to the behavioural threshold, e.g., the AUD INJ threshold for impulsive sound for the VHS group is 159 dB SEL (weighted), while the behavioural threshold is 160 dB SPL (unweighted). For a typical scenario, for 1 second's exposure (SEL equals SPL for 1-second durations) that means the range to the behavioural threshold will be larger than the range to the AUD INJ threshold (a difference of at least 1 dB). This effect will increase for noise with mostly low frequencies as they are "removed" by the weighting, and thus the comparison to the SEL threshold, but not from the comparison to the unweighted behavioural threshold. This is just one of the reasons why this behavioural threshold should be interpreted with caution.

Table 2-2: Disturbance Criteria for Marine Mammals Used in this Study based on Level B harassment of NMFS (National Marine Fisheries Service, 2005)

Effect	Non-Impulsive Threshold	Impulsive Threshold
Disturbance (all marine mammals)	120 dB SPL	160 dB SEL single impulse or 1-second SEL

2.5 Injury and Disturbance to Fishes

The injury criteria used in this noise assessment are given in Table 2-3 and Table 2-4 for impulsive noises and continuous noise respectively. L_P and SEL criteria presented in the tables are unweighted.

It's important to clarify that this lack of weighting for fishes reflects a lack of scientific consensus about the best method for applying frequency dependence to received levels for fishes, rather than a statement that fishes can hear all frequencies equally. Thus, fishes generally cannot hear above 10 kHz, and if they can the sensitivity is generally very poor (Figure 2-2, (Nedwell, et al., 2004)).

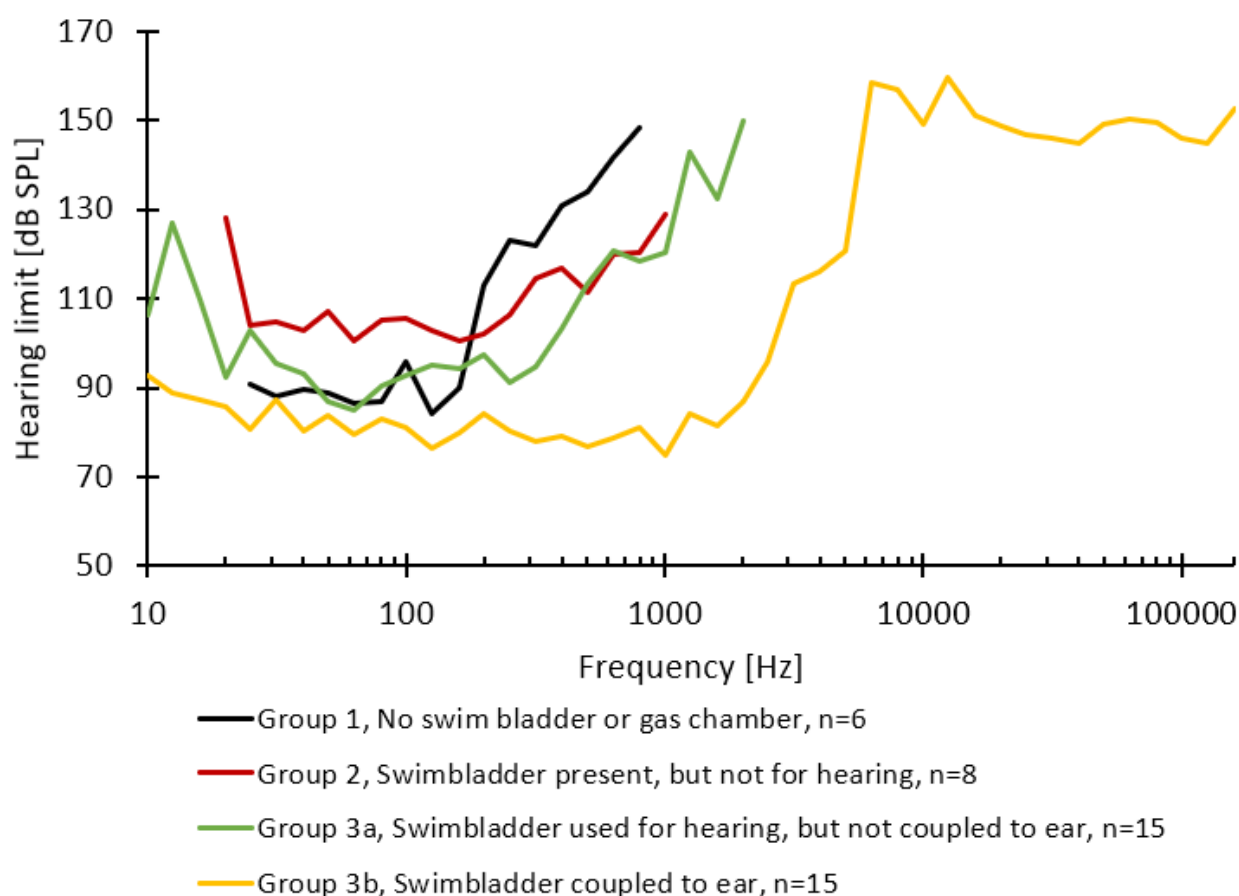


Figure 2-2 Generalised hearing thresholds for fishes grouped by the presence of a swim bladder and its role in hearing.

Subsea Noise Technical Report

Physiological effects relating to injury criteria are described below (Popper, et al., 2014):

- **Mortality and potential mortal injury:** either immediate mortality or tissue and/or physiological damage that is sufficiently severe (e.g., a barotrauma) that death occurs sometime later due to decreased fitness. Mortality has a direct effect upon animal populations, especially if it affects individuals close to maturity.
- **Recoverable injury (“AUD INJ” in tables and figures):** Tissue damage and other physical damage or physiological effects, that are recoverable, but which may place animals at lower levels of fitness, may render them more open to predation, impaired feeding and growth, or lack of breeding success, until recovery takes place.

The AUD INJ term is used here to describe this, more serious impact, even though it is not strictly permanent for fish. This is to better reflect the fact that this level of impact is perceived as serious and detrimental to the fish.

- **Temporary Threshold Shift (TTS):** Short term changes (minutes to few hours) in hearing sensitivity may, or may not, reduce fitness and survival. Impairment of hearing may affect the ability of animals to capture prey and avoid predators, and also cause deterioration in communication between individuals, affecting growth, survival, and reproductive success. After termination of a sound that causes TTS, normal hearing ability returns over a period that is variable, depending on many factors, including the intensity and duration of sound exposure.

Popper et al. 2014 does not set out specific TTS limits for L_P and for disturbance limits for impulsive noise for fishes. Therefore publications: “Washington State Department of Transport Biological Assessment Preparation for Transport Projects Advanced Training Manual” (WSDOT, 2020) and “Canadian Department of Fisheries and Ocean Effects of Seismic energy on Fish: A Literature review” (Worcester, 2006) on effects of seismic noise on fish are used to determine limits for these:

- The criteria presented in the Washington State Department of Transport Biological Assessment Preparation for Transport Projects Advanced Training Manual (WSDOT, 2020). The manual suggests an un-weighted sound pressure level of 150 dB SPL (assumed to be duration of 95 % of energy) as the criterion for onset of behavioural effects, based on work by (Hastings, 2002). Sound pressure levels in excess of 150 dB SPL are expected to cause temporary behavioural changes, such as elicitation of a startle response, disruption of feeding, or avoidance of an area. The document notes that levels exceeding this threshold are not expected to cause direct permanent injury but may indirectly affect the individual fish (such as by impairing predator detection). It is important to note that this threshold is for onset of potential effects, and not necessarily an ‘adverse effect’ threshold. The threshold is implemented here as either single impulse SEL or 1 second SEL, whichever is greater.
- The report from the Canadian Department of Fisheries and Ocean “Effects of Seismic energy on Fish: A Literature review on fish” (Worcester, 2006) found large differences in response between experiments. Onset of behavioural response varied from 107-246 dB L_P , the 10th percentile level for behavioural response was 160 dB L_P (rounded to nearest 5 dB to reflect large variation in data).

Thus, the behavioural threshold for fishes for impulsive sound is 160 dB L_P , and for non-impulsive sound 150 dB SPL.

Note that while there are multiple groups of fish presented, we have used the thresholds of the more sensitive group for all fish thus covering all fishes (203/186 AUD INJ/TTS for impulsive sound & 222/204 AUD INJ/TTS for non-impulsive sound). These lower thresholds also cover “Eggs and Larvae”.

Table 2-3: Criteria for onset of injury to fish and sea turtles due to impulsive noise. For this assessment the lowest threshold for any group is used for all groups (shown in bold).

Type of animal	Unit	Mortality and potential mortal injury [dB]	Recoverable injury (AUD INJ) [dB]	TTS [dB]	Behavioural [dB]
Fish: no swim bladder (particle motion detection)	SEL	219 ¹	216 ¹	186 ¹	150 ³
Example: Sharks.	L_P	213 ¹	213 ¹	193 ²	160 ²
	SEL	210 ¹	203 ¹	186 ¹	150 ³

Subsea Noise Technical Report

Fish: where swim bladder is not involved in hearing (particle motion detection). Example: Salmonoids.	LP	207 ¹	207 ¹	193 ²	160 ²
Fish: where swim bladder is involved in hearing (primarily pressure detection). Example: Gadoids (cod-like).	SEL	207 ¹	203¹	186	150³ [SPL]
	LP	207 ¹	207¹	193²	160²
Sea turtles	SEL	210 ¹	(Near) High* (Mid) Low (Far) Low	-	-
	LP	207 ¹		-	-
Eggs and larvae	SEL	210 ¹	(Near) Moderate (Mid) Low (Far) Low	-	-
	LP	207 ¹		-	-

¹ (Popper et al. 2014) table 7.4, ² (Worcester, 2006), ³ (WSDOT, 2020)

* Indicate (range) and risk of effect, e.g., "(Near) High", meaning high risk of that effect when near the source.

Where Popper et al. 2014 present limits as ">" 207 or ">" 186, we have ignored the "greater than" and used the threshold level as given.

Relevant thresholds for non-impulsive noise for fishes relating to AUD INJ, TTS, and behaviour are given in Table 2-4. Note that for the behaviour threshold we have used the impulsive threshold as basis for the continuous noise threshold, in absence of better evidence.

Table 2-4: Criteria for fish (incl. sharks) due to non-impulsive noise from Popper et al. 2014, table 7.7.

Type of animal	Unit	Mortality and potential mortal injury	Recoverable injury (AUD INJ) [dB]	TTS [dB]	Behavioural [dB]
All fishes	SEL	(Near) Low (Mid) Low (Far) Low	222 [†]	204 [†]	150 [SPL]*

*Based on the impulsive criteria.

[†]Based 48 hours of 170 dB SPL and 12 hours of 158 dB SPL

3 THE SITE ENVIRONMENT

3.1 SI Works Area of Interest

The SI Works Area of Interest (Aol) and nearby surroundings are characterised by water depths of 0-70 meters with a relatively gentle increase in depth with distance from the shore (Figure 3-1). The sediment properties are varied, from soft, muddy sediment to harder gravely sediments, with some areas being exposed or near-exposed bedrock of chalk, limestone or sandstone (generally found within 20 km of the coast).

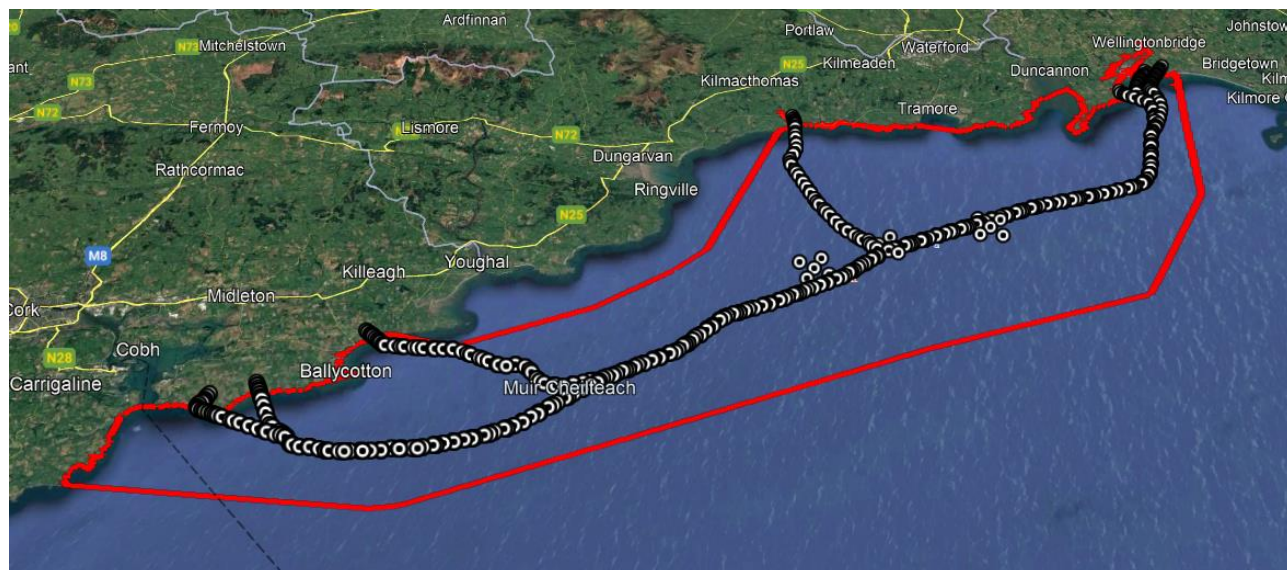


Figure 3-1: MUL Area of Interest and Proposed SI works locations along offshore transmission cable corridors and landfall zones

The survey speed is expected to be 4 knots (2.1 m/s), limited by the survey equipment. The survey transects plan is yet to be determined so reasonable worst-case locations throughout the Aol have been used as basis for the modelling rather than a specific survey plan.

3.2 Water Properties

Water properties were determined from historical data for the area. Where a range of values are expected or observed, the value resulting in the lowest transmission loss was chosen for a more conservative assessment (more noise at range). Thus, this also covers seasonal variation.

- Temperature: 20°C – maximal summer temperature given by <https://seatemperature.info/ardmore-water-temperature.html> for Ardmore.
- Salinity: 34 psu – <https://seatemperature.info/ardmore-water-temperature.html> for Ardmore.
- Soundspeed profile: Assumed generally uniform as a conservative measure (a typical summer sound speed profile would increase transmission loss by refracting sound towards the sediment).

3.3 Sediment Properties

Sediment properties are based on sediments given in Table 3-1.

Subsea Noise Technical Report

Sediment types are informed by the “Folk 7-class Classification” from EMODnet Geology⁵ (European Commission, 2024) and from grab samples by GSI⁶. A sediment model (Ainslie, 2010) was used to derive the acoustic properties of the sediment from the grain size. (Table 3-1).

Table 3-1: Sediment Properties for the two survey areas.

Folk Sediment name	Sediment type (ISO 14688-1:2017)	Density [kg/m ³]	Soundspeed [m/s]	Grain size [mm] (nominal)
Muddy sand	Fine sand	1862	1679	0.09
Gravelly muddy sand	Fine sand	1992	1739	0.2
Sandy gravel	Fine gravel	2779	2127	5.7
Sandstone or limestone	-	2400	3000	-

⁵ <https://drive.emodnet-geology.eu/geoserver/gtk/wms>

⁶ <https://gsi.geodata.gov.ie/portal/home/item.html?id=27c9ef6e837a4ee3b08bc1dd7f870ead>

4 SOURCE NOISE LEVELS

Underwater noise sources are usually quantified in dB scale with values generally referenced to 1 μ Pa pressure amplitude as if measured at a hypothetical distance of 1 m from the source (called the Source Level). In practice, it is not usually possible to measure at 1 m from a source, but the metric allows for comparison and reporting of different source levels on a like-for-like basis. In reality, for a large sound source, this imagined point at 1 m from the acoustic centre does not exist. Furthermore, the energy is distributed across the source and does not all emanate from an imagined acoustic centre point. Therefore, the stated sound pressure level at 1 m does not occur for large sources. In the acoustic near-field (i.e. close to the source), the sound pressure level will be significantly lower than the value predicted by the back-calculated source level (SL).

4.1 Source Models

The noise sources and activities investigated during this assessment are summarised in Table 4-1.

Note that:

1. The ping rate, and therefore the SPL and SEL of the sound source varies with the local depth.
2. Due to differences in sediment, the angle at which the sediment will tend to reflect sound back into the water column changes. As we use this information to derive practical source levels for highly directional sources, this will change with sediment type (further information below and in Appendix A & Figure 8-7).
3. To account for the shallow depth, and therefore assumed short duration of pulses from Multibeam Echo-Sounder (MBES), Side Scan Sonar (SSS) and pinger/chirper, we have assessed the weighted kurtosis in order to determine impulsiveness (Section 2.1).

Sonars and echosounders generally use tone pulses of either constant frequency or as a frequency sweep. These pulses are typically windowed to limit “spectral leakage”⁷. We assume use of a Von Hann window (sometimes “Hanning”) which gives effective attenuation of frequencies outside the intended frequencies. This means that while a sonar with a centre frequency of 200 kHz is well above the hearing range of any marine mammal, there will be energy at 100 kHz c. 50 dB lower than the source level at 200 kHz. This is accounted for in the assessment. Note that this might contrast with some guidelines, such as the “JNCC guidelines mitigation during geophysical surveys” (JNCC, 2017), which state that “*Multi-beam surveys in shallower waters (<200m) are not subject to these requirements* [mitigation for protection of European Protected Species]”. However, given the fact there is substantial energy outside the nominal frequency range of any echo sounder (see example in Figure 4-1), we have included this energy spread here.

⁷ Acoustic phenomenon where a sharp change in pressure produces sound in a wide frequency range (similar to an ideal impulse) outside the intended frequencies.

Subsea Noise Technical Report

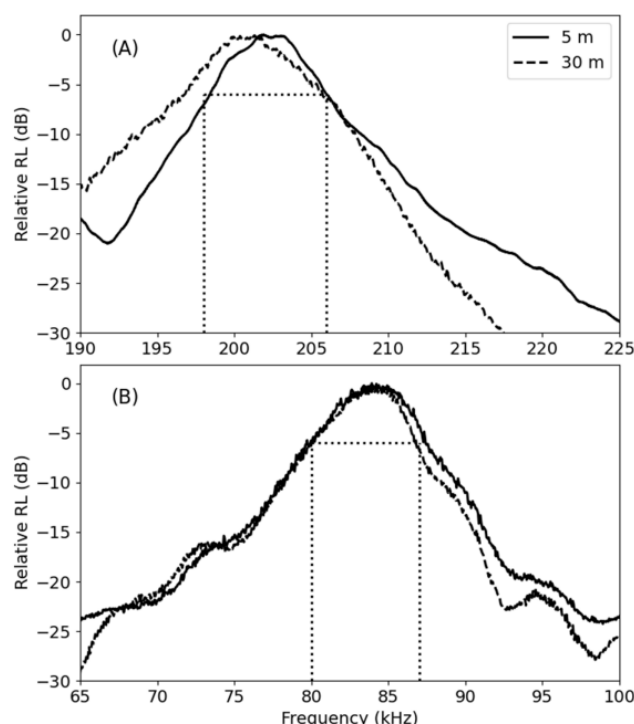


Figure 4. The relative received levels (RLs, in decibels (dB)) of the signals of the acoustic frequency bandwidth of the dual-frequency echosounder used in this study, as observed at two different depths. The dotted lines indicate the -6 dB acoustic bandwidths of 198–206 (A) and 80–87 kHz (B). The peak frequencies of the two channels were found to be 201.5 (A) and 84 kHz (B).

Figure 4-1. Example of recorded levels from an echosounder showing significant energy outside the nominal frequencies, necessitating assessment at those frequencies too (Burnham, et al., 2022).

Highly directional sources with narrow beams (sonars and echosounders) will tend to ensonify only a narrow cone of water at any given time. For multibeam echosounders or side scan sonars, the beam(s) sweeps though the water, side to side, to get wider sediment coverage. For this type of sonar, we have converted the source to an omnidirectional source with the same acoustic energy as the original but represented as omnidirectional. This simplifies the calculation process, but yields identical results, and means that we account for the probabilistic nature of an animal being “ensonified” by the source.

For beams only directed vertically down or up, such as sub-bottom profilers or ADCPs, we incorporate the directivity of the beam as well as the ability of the sediment to reflect the sound emitted. This means that we can account for the fact that primarily, a narrow cone directly below/above the source is ensonified with high sound levels and also that a significant attenuation occurs in the sediment where sound enters at steep angles. In practice, we use the angle with the highest output level after accounting for directivity combined with sediment loss to a range of 100 m.

Table 4-1: Summary of Sound Sources and Activities Included in the Subsea Noise Assessment

Equipment	Source level [SPL] (as used in model)	Primary decade bands (-20 dB width)	Source model details	Impulsive/non- impulsive
Survey vessel, Geophysical, nearshore	160 dB SPL	10-4,000 Hz	Based on 15 m generic survey vessel.	Non-impulsive
Survey vessel, Geophysical, offshore, with DP- system	183 dB SPL	10-2,500 Hz	Based on 75 m generic survey vessel with DP- system active.	Non-impulsive
Survey vessel, Geotechnical	176 dB SPL	10 – 2,000 Hz	Based on 75 m generic survey vessel.	Non-impulsive

Subsea Noise Technical Report

Equipment	Source level [SPL] (as used in model)	Primary decade bands (-20 dB width)	Source model details	Impulsive/non- impulsive
MBES	178 dB SPL (Spherical equivalent level)	200,000-500,000 Hz	Based on units suitable for this survey.	Impulsive
SSS	165 dB SPL (Spherical equivalent level)	100,000-900,000 Hz	Generic SSS from 400- 900 kHz.	Impulsive
USBL	190 dB SPL	8,000-40,000 Hz	Active with non-hull mounted SSS & SBP & during vibro-core operations, 2 Hz ping rate, ping length 10 ms.	Impulsive
SBP-parametric (P-SBP)	208 dB SPL	80,000-115,000 Hz (Primary) 2,000-22,000 Hz (Secondary)	Source level adjusted for sediment effects and beam widths.	Impulsive
SBP-chirper/pinger (C-SBP)	185 dB SPL	1,000-20,000 Hz	Generic shallow water SBP of chirper/pinger type. Source level adjusted for sediment effects and beam widths.	Impulsive
SBP-sparker/UHRS (S-SBP)	185 dB SPL 224 dB L _P	600 – 8,000 Hz	Based on GeoSource firing at 1000 J. Firing rate of 1 Hz assumed	Impulsive
SBP-boomer (B-SBP)	185 dB SPL 228 dB L _P	160 – 16,000 Hz	Based on generic boomer model firing at 1000 J. Firing rate of 1 Hz assumed	Impulsive
ADCP	207 dB SPL	300,000-600,000 Hz	Based on suitable ADCP for depths <65 m (e.g. Nortek AWAC, Teledyne Reason Sentinel or Monitor) Source level adjusted for sediment effects and beam widths.	Impulsive
Borehole drilling/ rotary coring	150 dB SPL	10-100,000 Hz	Based on published levels (Erbe, et al., 2017; Fisheries and Marine Service, 1975; MR, et al., 2010; L-F, et al., 2023)	Non-impulsive
Vibro-coring & CPT	189 dB SPL	50 – 16,000 Hz	Based on levels from previous work & (Reiser, et al., 2010)	Non-impulsive

In addition to the activities outlined above, there may also be grab sampling. However, this activity has not been modelled given the low noise levels associated with the activity. All other surveys undertaken in the intertidal area, e.g. environmental walkover surveys, intertidal sampling, etc. have not been included in this assessment as they will not result in underwater noise.

Subsea Noise Technical Report

4.1.1 Equipment

This section presents details on each sound source individually. Combined sources, with expected combination of active equipment, are presented in Section 4.1.2.

The modelling has included for larger and smaller vessel types depending on water depths. Smaller vessels will operate in water depths less than 15m below lowest astronomical tides (<15 m bLAT) while larger vessels will operate at water depths greater than 15m below lowest astronomical tides (>15 m bLAT).

4.1.1.1 Survey Vessel, Geophysical <15 m bLAT

A small survey vessel of up to 15 m in length, travelling at 4 knots (equipment limited) has been assessed in this report as this represents the anticipated vessel parameters for the marine geophysical surveys <15 m bLAT. Broadband level of the vessel is 160 dB SPL with decidecade band levels given in Figure 4-2 (maximal band level is 150 dB SPL at the 25 Hz band). Smaller vessels will have lower emitted levels and are therefore covered by this assessment.

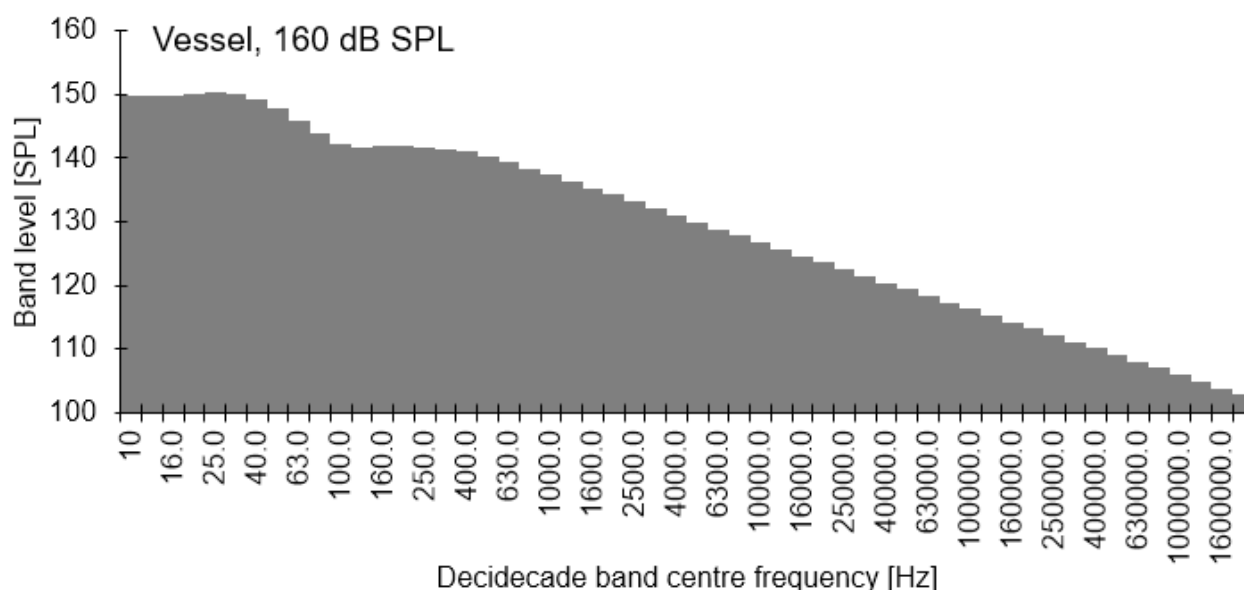


Figure 4-2. Vessel source band levels. Broadband level: 160 dB SPL. Based on generic small survey craft, c. 15 m length travelling at 4 kn.

4.1.1.2 Survey Vessel, Geophysical >15m bLAT

A large survey vessel of c. 75 m in length, travelling <9 knots (assumed cavitation inception speed) has been assessed in this report as this represents the anticipated vessel parameters for the marine geophysical surveys in deeper waters, i.e. > 15 m bLat . Broadband level of the vessel is 176 dB SPL with decidecade band levels given in Figure 4-3 (maximal band level is 166 dB SPL at the 10 Hz band). Smaller vessels will have lower emitted levels and are therefore covered by this assessment.

Subsea Noise Technical Report

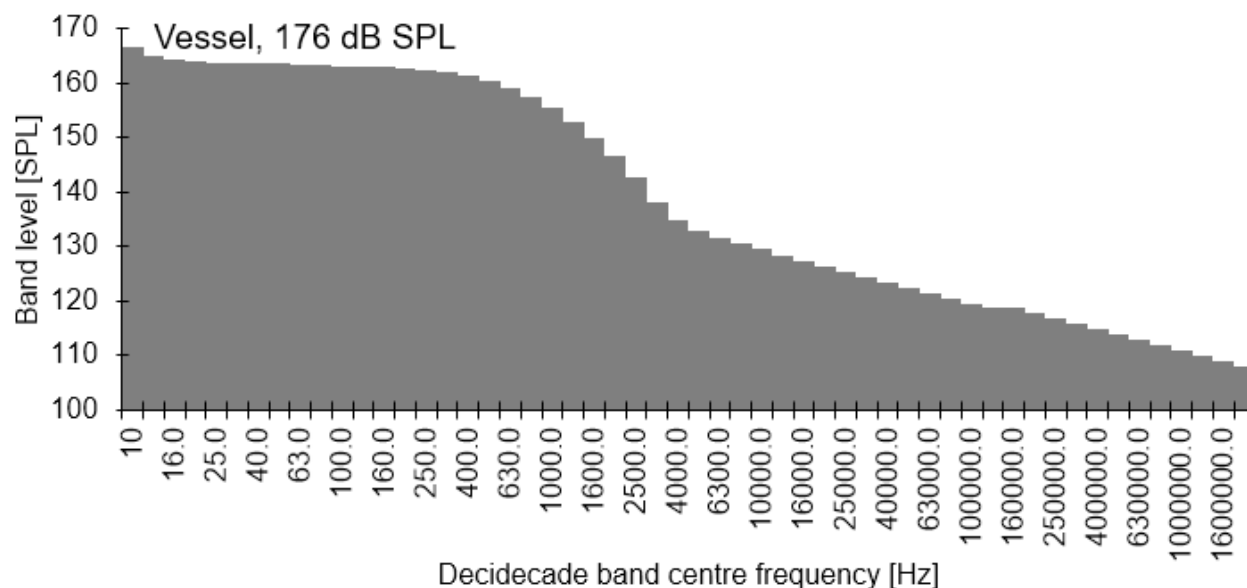


Figure 4-3. Vessel source band levels. Broadband level: 176 dB SPL. Based on generic larger survey craft, c. 75 m length travelling <9 kn.

4.1.1.3 Survey Vessel, Geotechnical

A large survey vessel of c. 75 m in length, travelling <9 knots (likely cavitation inception speed), with active dynamic positioning, has been modelled as a suitable vessel for carrying out the geotechnical survey in deeper water >15 m bLAT. Broadband level of the vessel is 183 dB SPL with decade band levels given in Figure 4-4 (maximal band level is 172 dB SPL at the 315 Hz band). Smaller vessels will have lower emitted levels and are therefore covered by this assessment.

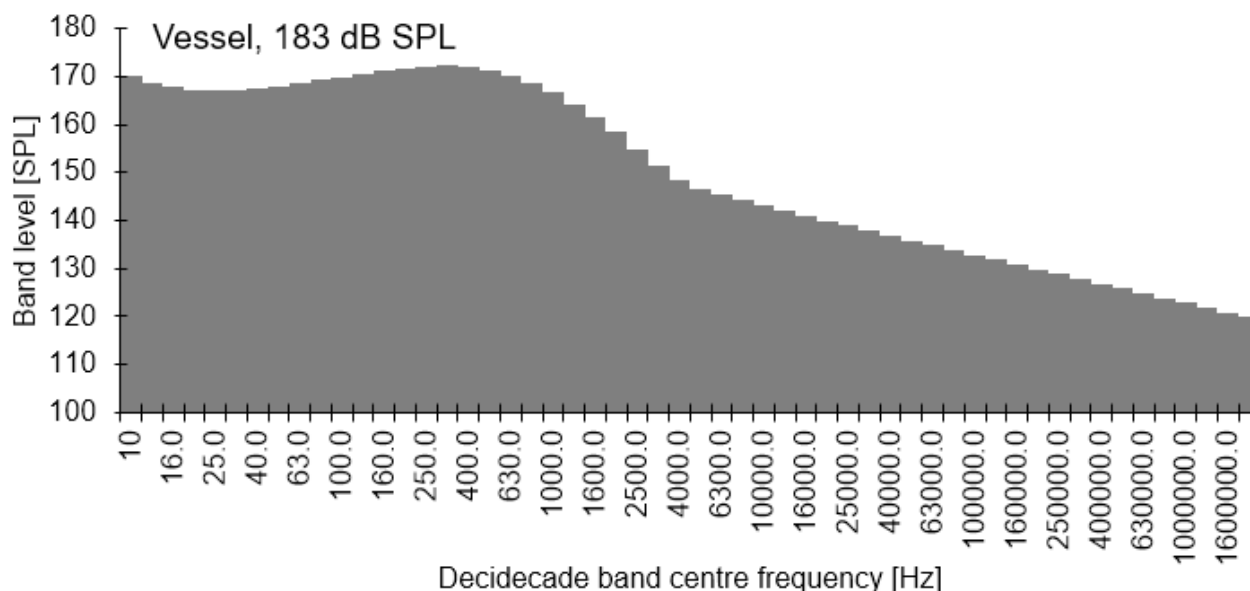


Figure 4-4. Vessel source band levels. Broadband level: 183 dB SPL. Based on generic larger survey craft, with an active DP system, c. 75 m length travelling <9 kn.

Subsea Noise Technical Report

4.1.1.4 Multibeam Echosounder (MBES)

The “Reason SeaBat T50-P”, “R2 Sonic 2024”, “Kongsberg EM series”, or similar models, are a likely MBES candidate for this survey. Nominal frequencies from 200 kHz to 500 kHz have been modelled. The equivalent spherical level is 178 dB SPL (maximally 171 dB SPL in each band). Band levels are presented in Figure 4-5.

Given the relatively low duty cycle of the MBES, the kurtosis (“impulsiveness”) will be over 40 (indicating it is impulsive) at the source for realistic ping rates and ping lengths. Therefore, the MBES is modelled as an impulsive noise source.

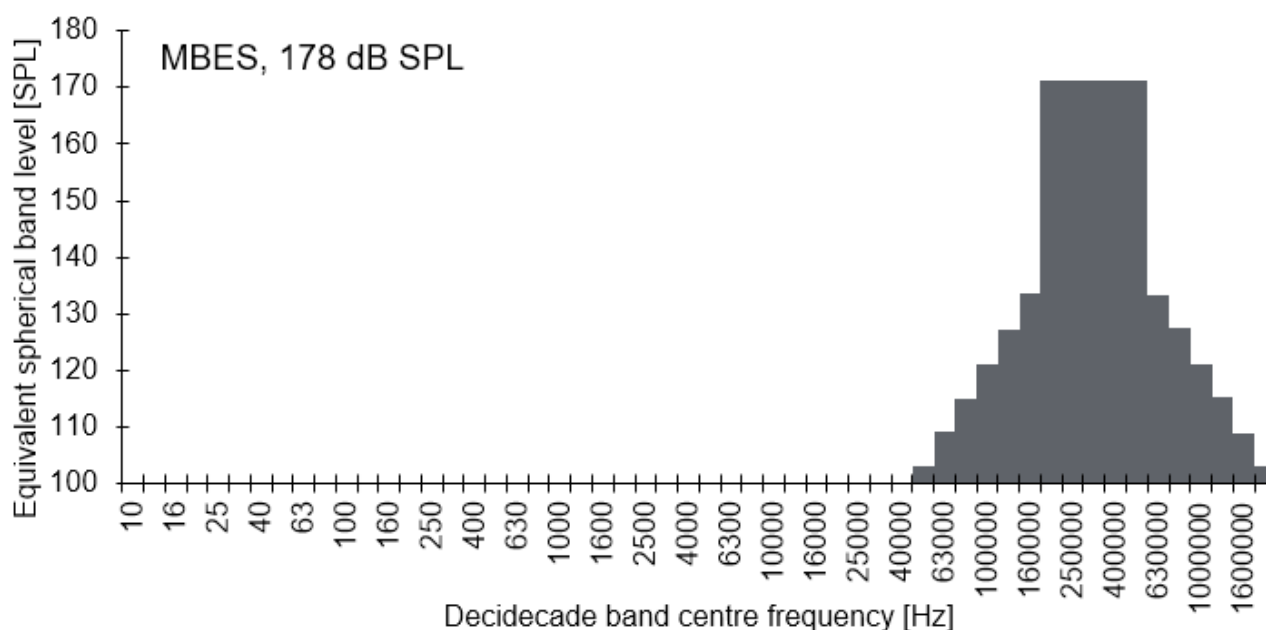


Figure 4-5. MBES source band levels as equivalent spherical/omnidirectional levels.

4.1.1.5 Side Scan Sonar (SSS)

No specific model of side scan sonar (SSS) has been determined for the survey, except for specification of nominal frequencies of 100 – 900 kHz. To address this uncertainty, a generic SSS model has been generated from seven commonly used SSS systems (from EdgeTech, C_MAX and Klein Systems). We have used the 90th percentile level as the representative level. The equivalent spherical broadband level is 165 dB SPL (Figure 4-6).

Given the relatively low duty cycle of the SSS, the kurtosis (“impulsiveness”) will be over 40 (indicating it is impulsive) at the source for realistic ping rates and ping lengths. Therefore, the SSS is modelled as an impulsive noise source.

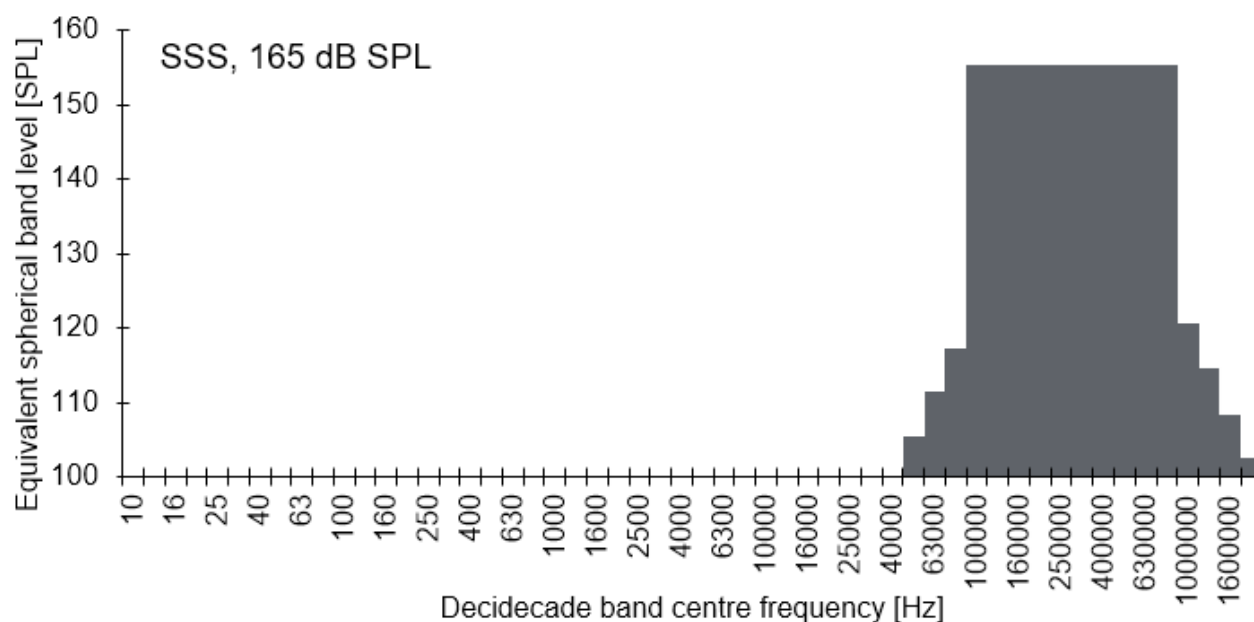


Figure 4-6. SSS source band levels as equivalent spherical/omnidirectional levels.

4.1.1.6 Ultra Short Base-Line positioning system (USBL)

Where the SSS or SBP is deployed as a towfish (towed behind the vessel), or vibrocores are deployed, their accurate positions will need to be known. A USBL positioning system is a common solution. Here, a generic USBL is used, with a 10 ms pulse length and 2 Hz ping rate, consistent with popular models (Edgetech BATS, IxBlue GAPS, Sonardyne Ranger). A max SPL [L_p] of 210 dB is modelled, giving an SPL of 190 dB (Figure 4-7).

The relatively short pulses and slow repetition of pulse gives a weighted kurtosis over the limit value (40), therefore, the USBL is modelled as an impulsive noise source.

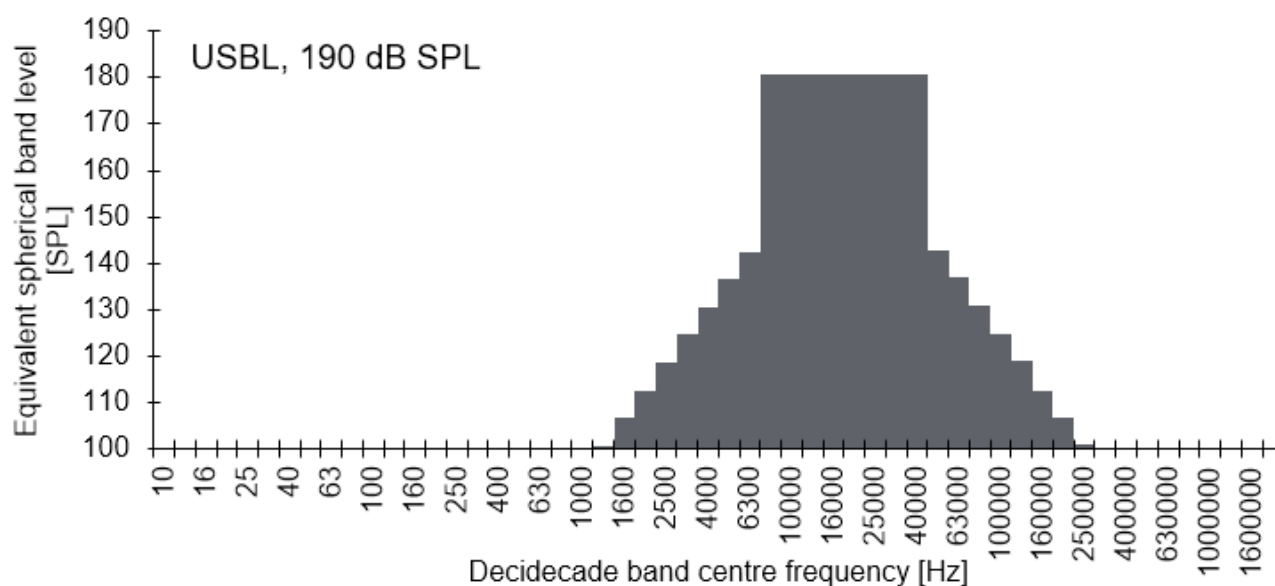


Figure 4-7. USBL source band levels.

4.1.1.7 Sub-bottom Profilers (SBP)

4.1.1.7.1 Parametric SBP (P-SBP)

The survey might use a parametric sub-bottom profiler (SBP) such as the “Innomar standard”. These SBPs use two higher frequencies (“primary frequencies”) to generate an interference pattern at lower frequencies (“secondary frequencies”). This means that the secondary beam can be made extraordinarily narrow, leading to a much smaller sound impact (Appendix A, Figure 8-8). We account for these differences in beam pattern by including the sediment reflection loss at high incidence angles (see Appendix A, Figure 8-7) to reduce the effective source level accordingly.

The source level for the P-SBP is split into two regions according to the nominal frequencies, accounting for some spectral leakage (Figure 4-8) and assuming the full range of frequencies is used during the survey (a conservative assumption). The total, broad band level for the parametric SBP is 208 dB SPL, with the secondary frequencies being 158 dB SPL.

Given the relatively low duty cycle of the P-SBP, the kurtosis (“impulsiveness”) will be over 40 at the source for realistic ping rates and ping lengths. Therefore, the P-SBP is modelled as an impulsive noise source.

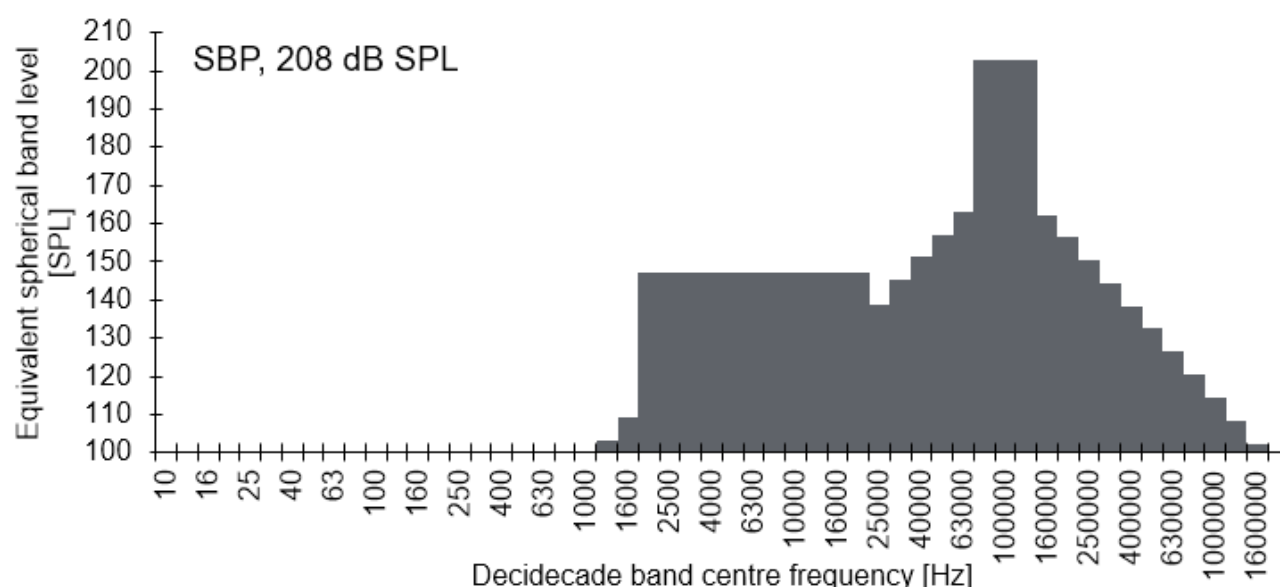


Figure 4-8. Parametric SBP source band levels as equivalent spherical/omnidirectional levels. Primary frequencies 85 kHz – 115 kHz, secondary frequencies 2 kHz – 22 kHz.

4.1.1.7.2 Chirper/Pinger SBP (C-SBP)

A chirper or pinger type SBP might be used for the survey. As no specific model has been specified, we have used a generic model based on common SBPs of this type. These have wide beams and therefore a comparatively higher noise impact, relative to their in-beam source levels. A single SBP source has been generated to represent both these sources as they are acoustically similar. Total broadband level for this SBP is 185 dB SPL with band levels given in Figure 4-9.

Given the relatively low duty cycle of the C-SBP, the kurtosis (“impulsiveness”) will be over 40 at the source for realistic ping rates and ping lengths. Therefore, the C-SBP is modelled as an impulsive noise source.

Subsea Noise Technical Report

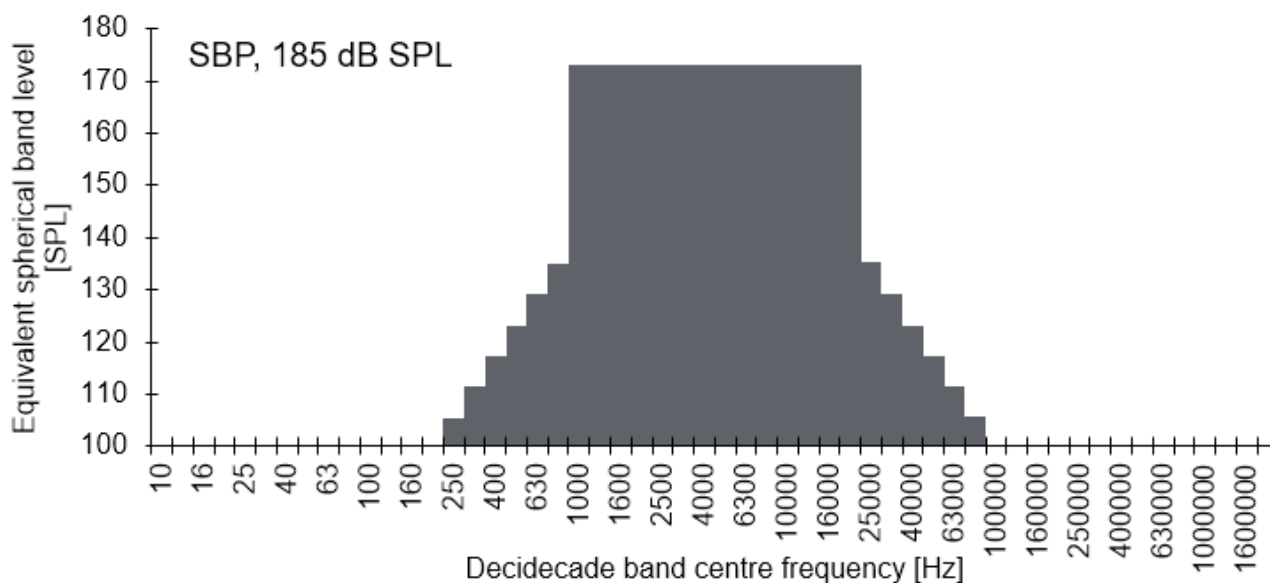


Figure 4-9. Chirper/Pinger type SBP band levels.

4.1.1.7.3 Sparker/UHRS SBP (S-SBP)

A sparker type SBP (sometimes “UHRS”) might be used during the survey. As no specific model has been specified, we have used a generic model based on common SBPs of this type and an energy per firing of 1000 J and 1 firing per second. The total broadband level for this SBP is 185 dB SPL, with band levels given in Figure 4-10. Levels at frequencies below 100 Hz are taken from a spectral analysis of the timeseries in Figure 4-11, while levels above are extrapolated at a decay-rate of 3 dB/decade (this is a conservative measure).

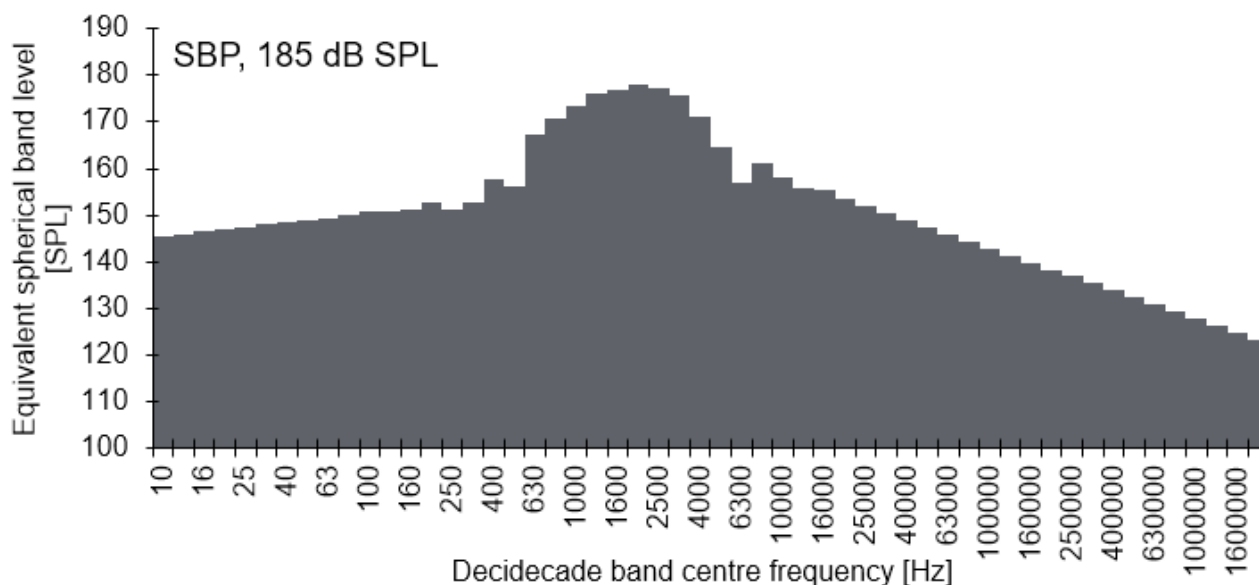


Figure 4-10. Sparker type SBP (UHRS) band levels.

The very short impulses and slow repetition mean that this source is modelled as an impulsive noise source.

Subsea Noise Technical Report

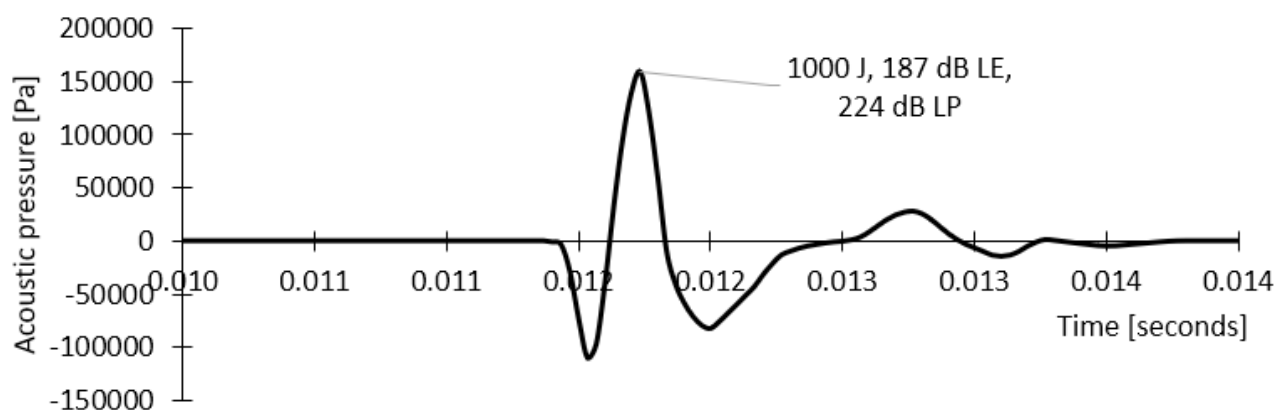


Figure 4-11. Example of an impulse from a sparker type SBP.

4.1.1.7.4 Boomer SBP (B-SBP)

A boomer type SBP might be used during the survey. As no specific model has been specified, we have used a generic model based on common SBPs of this type and an energy per firing of 1000 J and 1 firing per second. The total broadband level for this SBP is 187 dB SPL, with band levels given in Figure 4-12.

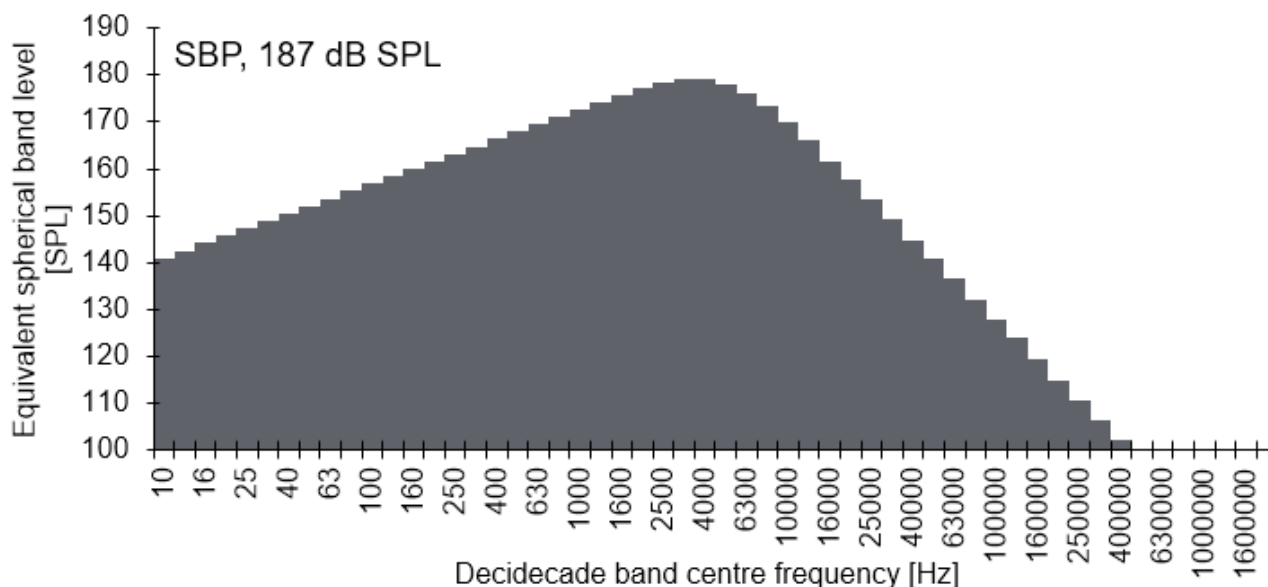


Figure 4-12. Boomer type SBP band levels.

The very short impulses and slow repetition mean that this source is modelled as an impulsive noise source.

Subsea Noise Technical Report

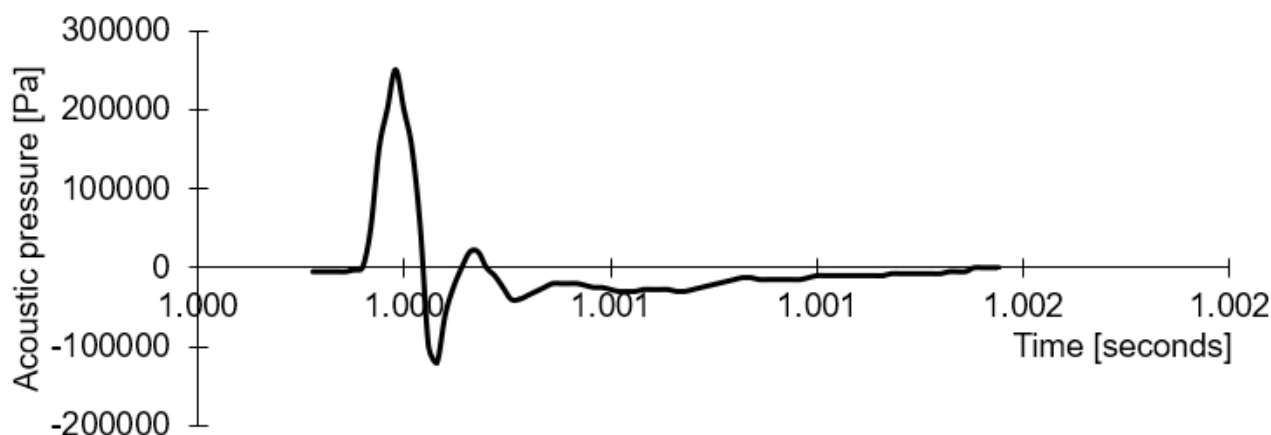


Figure 4-13. Example of an impulse as recorded from a boomer type SBP.

4.1.1.8 Boreholes Drilling

Boreholes are planned in the shallow parts of the SI Works area, with a drill of c. 0.25 m diameter. Recordings from similar equipment has informed the source levels used here (Erbe, et al., 2017; Fisheries and Marine Service, 1975; MR, et al., 2010; L-F, et al., 2023) Figure 4-14. This activity is a non-impulsive sound source with a broadband level of 150 dB SPL.

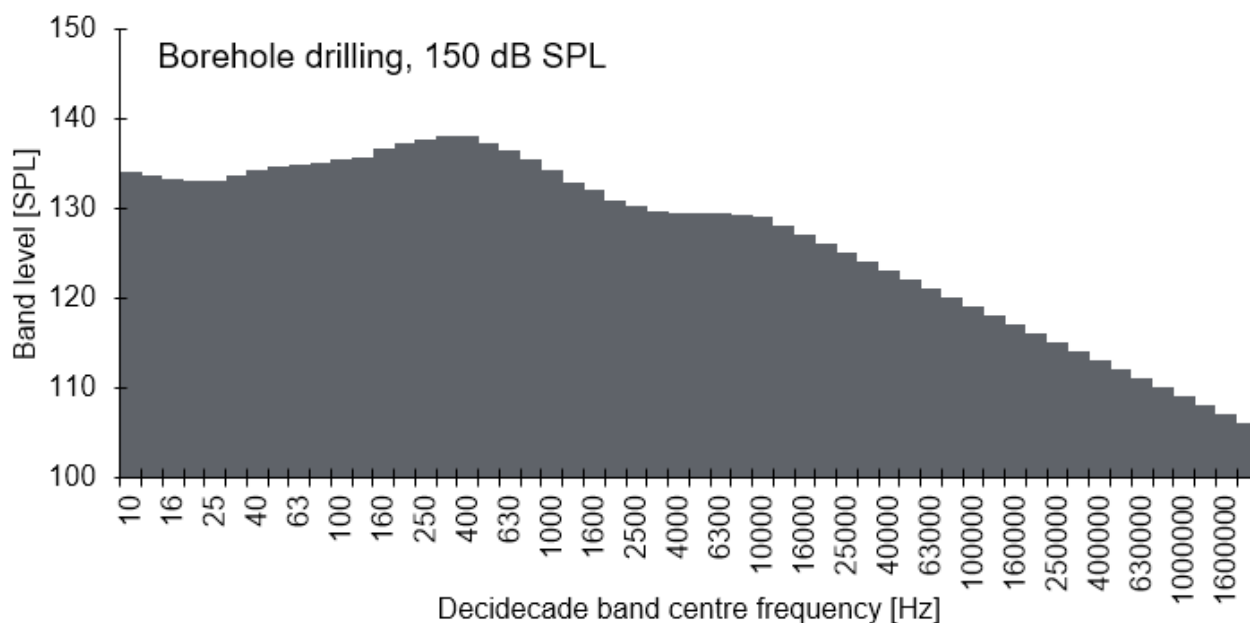


Figure 4-14. Band levels for borehole drilling, Levels above 25 kHz are extrapolated based on trend in bands at lower frequencies.

4.1.1.9 Vibro-coring & CPT

For extraction of physical samples and sediment testing, vibro-coring and Cone Penetration Testing (CPT) will be carried out. Band levels are shown in Figure 4-15. The “Vibro-coring & CPT” activity is a non-impulsive sound source with a broadband level of 189 dB SPL. Standard Penetration Testing (SPT) is here used as a proxy for CPT as the sampling tubes are of similar dimensions. SPT will be louder than CPT for comparable equipment dimensions given that SPT is generally hammered in, while CPT will be pressed hydraulically. For this assessment the vibro-corer source is louder, and thus the main contributor of noise.

Subsea Noise Technical Report

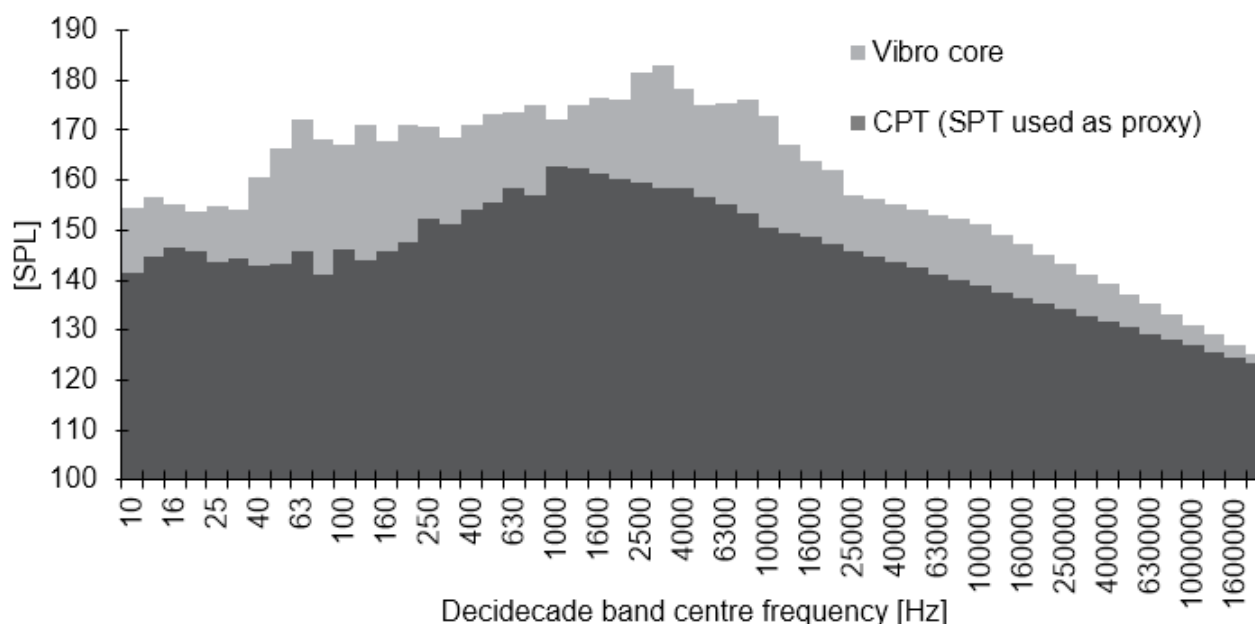


Figure 4-15. Band levels vibro-coring and CPT. Levels above 25 kHz are extrapolated based on trend in bands at lower frequencies.

4.1.1.10 ADCP

The ADCP will be deployed either on a metocean buoy, facing downward, or on the sediment, facing upwards. The source is based on suitable ADCPs for depths <65 m (e.g. Nortek AWAC, Teledyne Reason Sentinel, Workhorse or Monitor).

The source level is adjusted for sediment effects and beam widths. Band levels are shown in Figure 4-16. The ADCP activity is an impulsive sound source with a broadband level of 207 dB SPL.

ADCPs for shallower depths utilise higher frequencies and lower source output, meaning they are less noisy to marine life, and thus covered by the assessment of this source.

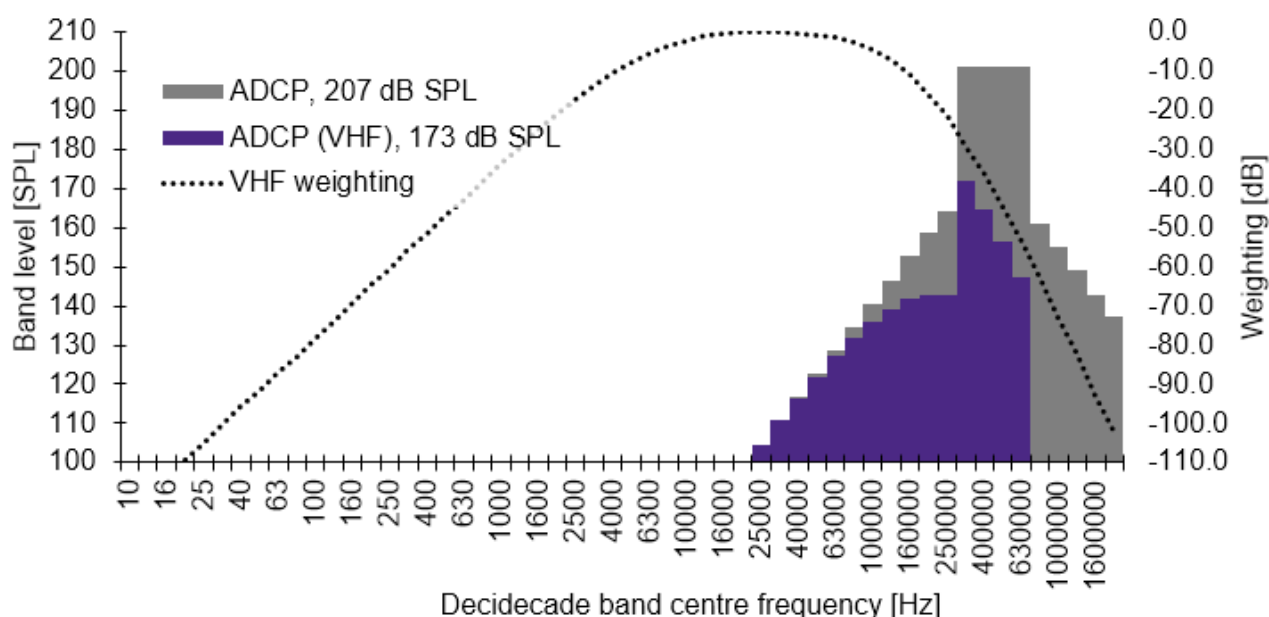


Figure 4-16. Band levels for a generic ADCP suitable for the depths of this survey. Also shown are the weighting curve for the VHF group (dotted, right axis) and the ADCP source band levels weighted for the VHF group (purple).

4.1.2 Combined Sources

The relevant equipment for each survey type has been grouped into eight activity types.

MBES and SSS are active for all combined sources of the geophysical survey.

The “Vessel” noise source varies with depth (nearshore and offshore) and activity types (geophysical and geotechnical).

4.1.2.1 Geophysical Survey (Parametric SBP)

This scenario assumes the geophysical survey is using a parametric SBP and that a towfish is deployed requiring an active USBL. Total broadband level of 208 dB SPL.

Active equipment:

- Vessel (75 m vessel shown in figure)
- MBES
- SSS
- USBL
- Parametric SBP

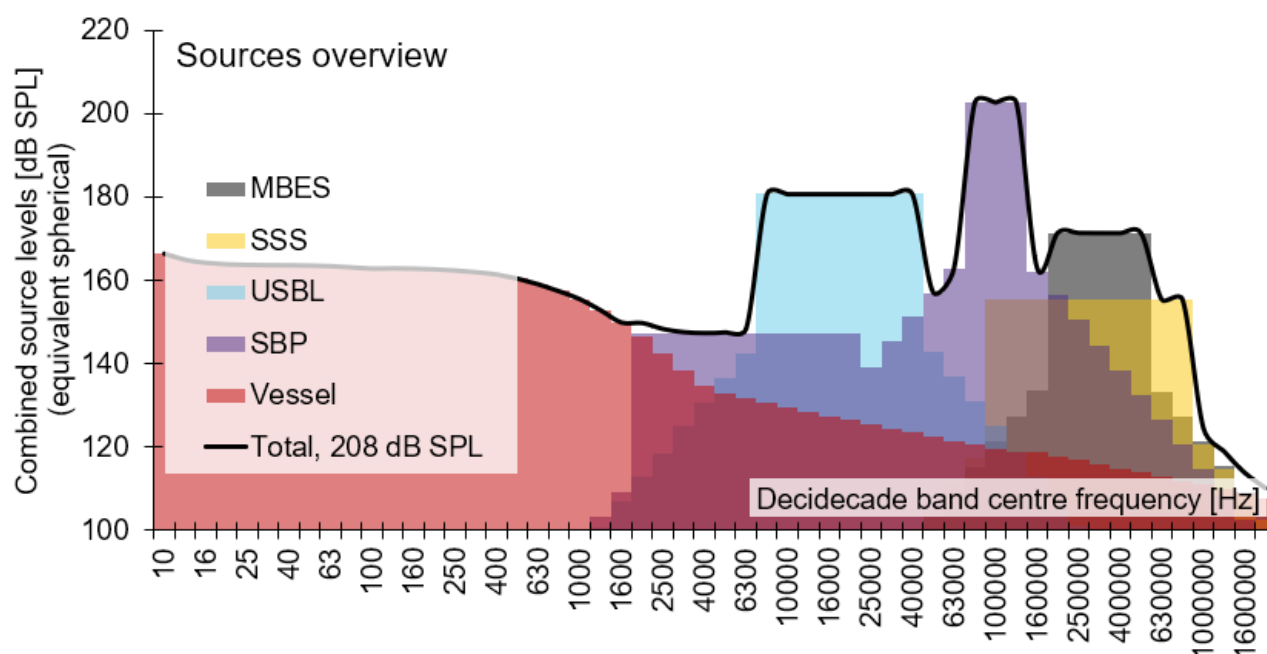


Figure 4-17. Source band level during geophysical survey (parametric SBP).

Subsea Noise Technical Report

4.1.2.2 Geophysical Survey (Chirper/Pinger SBP)

This scenario assumes the geophysical survey is using a chirper or pinger type SBP and that a towfish is deployed requiring an active USBL. Total broadband level of 191 dB SPL.

Active equipment:

- Vessel (75 m vessel shown in figure)
- MBES
- SSS
- USBL
- Chirper/pinger SBP

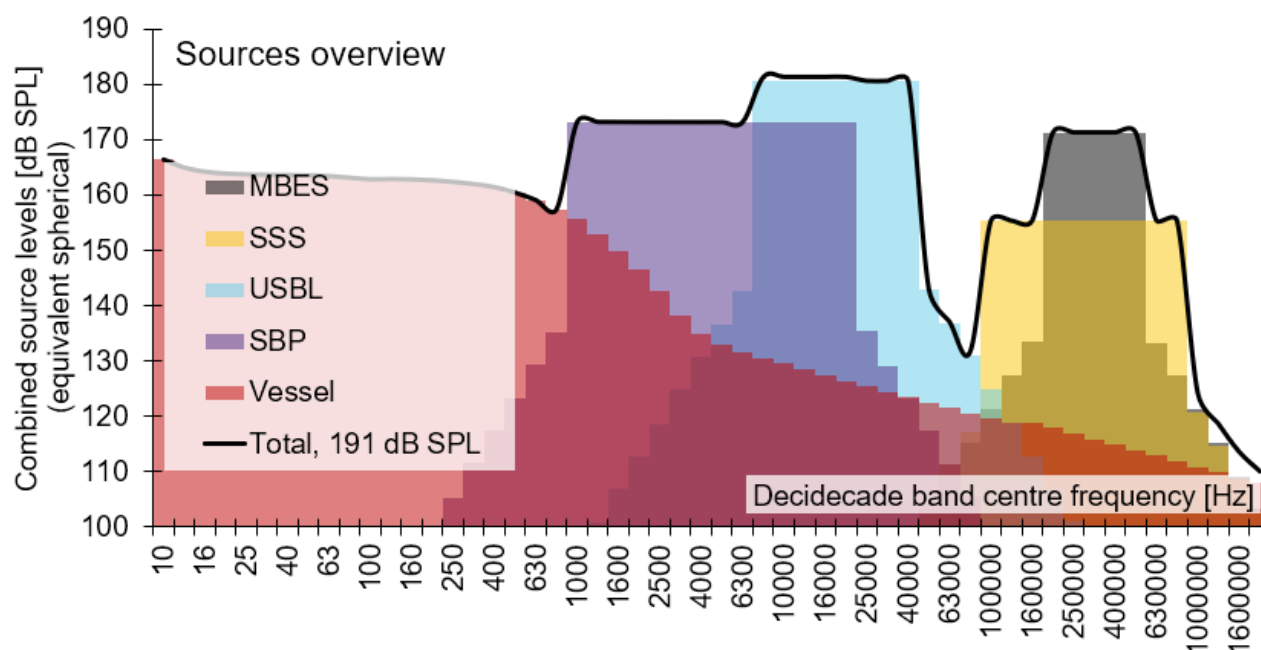


Figure 4-18. Source band level during geophysical survey (chirper/pinger SBP).

Subsea Noise Technical Report

4.1.2.3 Geophysical Survey (Sparker/UHRS SBP)

This scenario assumes the geophysical survey is using a sparker type SBP and that a towfish is deployed requiring an active USBL. Total broadband level of 191 dB SPL.

Active equipment:

- Vessel (75 m vessel shown in figure)
- MBES
- SSS
- USBL
- Sparker SBP

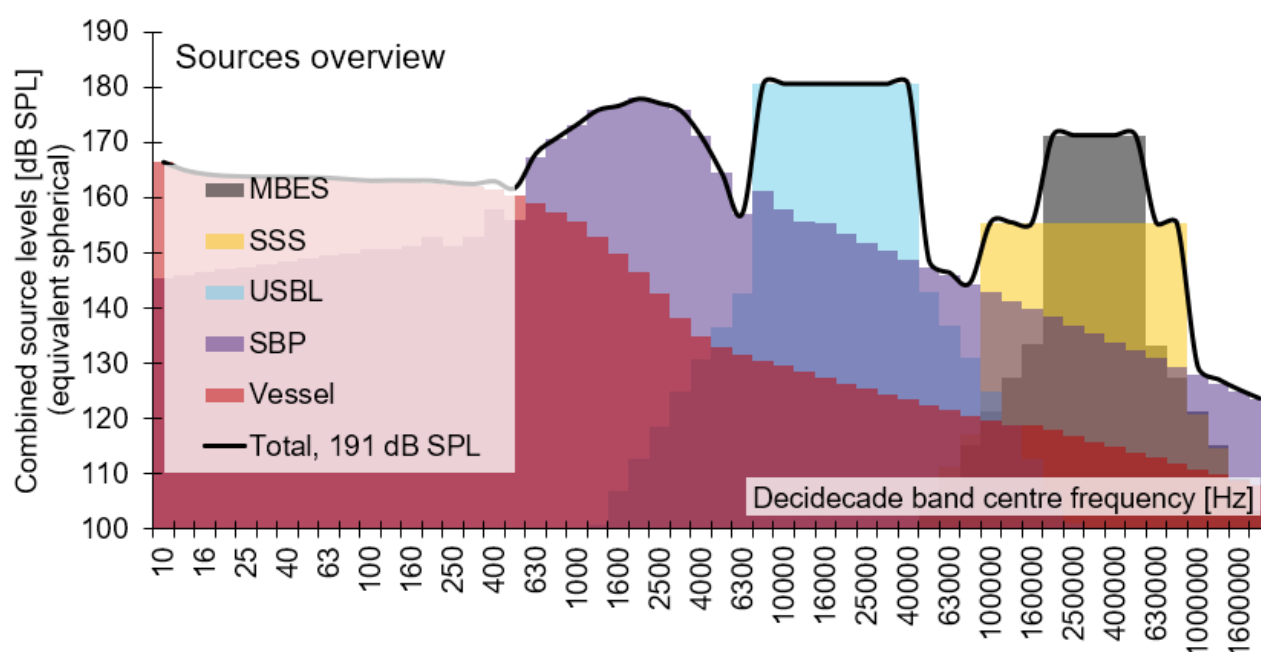


Figure 4-19. Source band level during geophysical survey (sparker SBP).

Subsea Noise Technical Report

4.1.2.4 Geophysical Survey (Boomer SBP)

This scenario assumes the geophysical survey is using a Boomer type SBP and that a towfish is deployed requiring an active USBL. Total broadband level of 192 dB SPL.

Active equipment:

- Vessel (75 m vessel shown in figure)
- MBES
- SSS
- USBL
- Boomer SBP

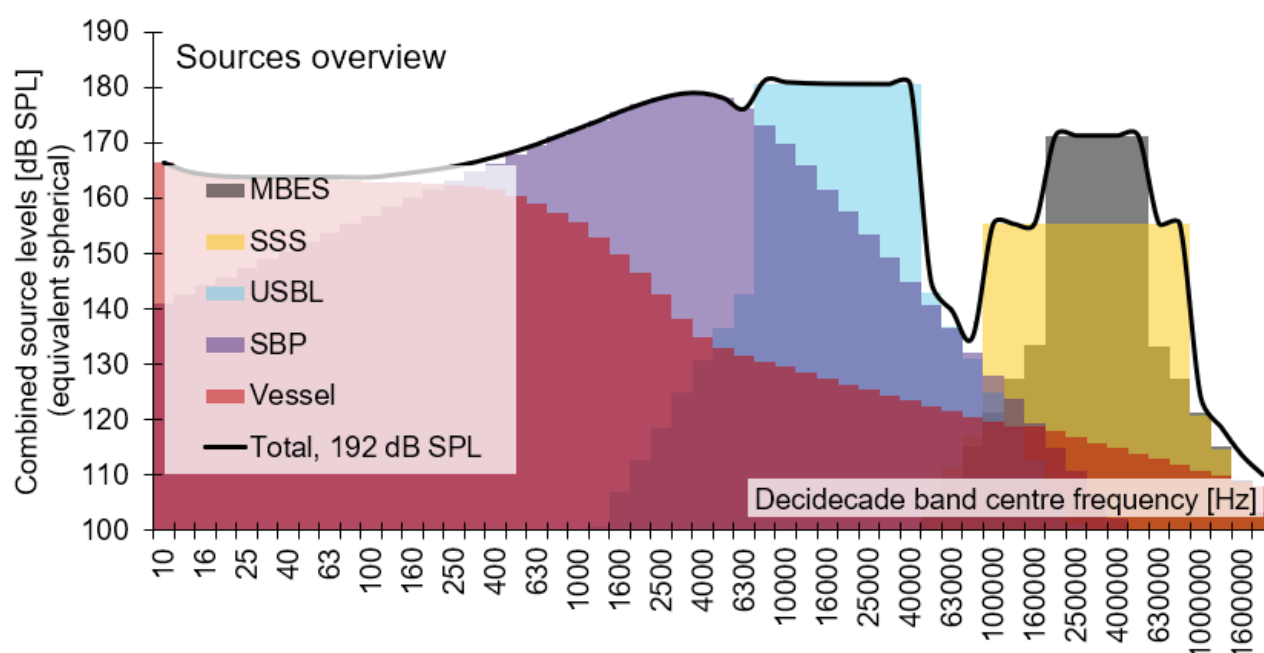


Figure 4-20. Source band level during geophysical survey (boomer SBP).

Subsea Noise Technical Report

4.1.2.5 Soft Start Source (Geophysical)

During soft starts, it is assumed that any SBP and USBL will not be active but the MBES and/or the SSS will be active. Total broadband level of 178 dB SPL.

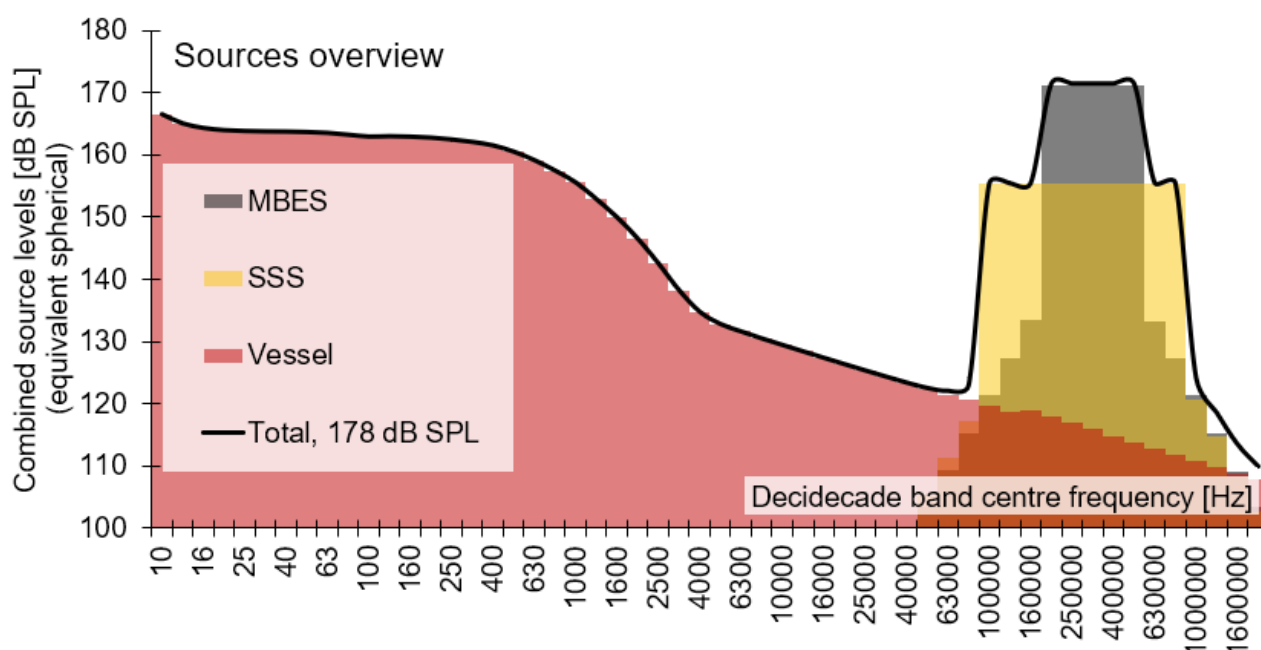


Figure 4-21. Source band level during geophysical survey soft start. Offshore vessel shown.

4.1.2.6 Geotechnical Survey (Borehole drilling, Vibro-core, CPT)

Geotechnical equipment is active and has been included into a single activity. The borehole drilling is thus covered by the Vibro-coring and CPT activity. Additionally, the USBL and Vessel source (incl. DP system) is active to account for support vessels, general machinery and positioning. Total broadband level of 193 dB SPL.

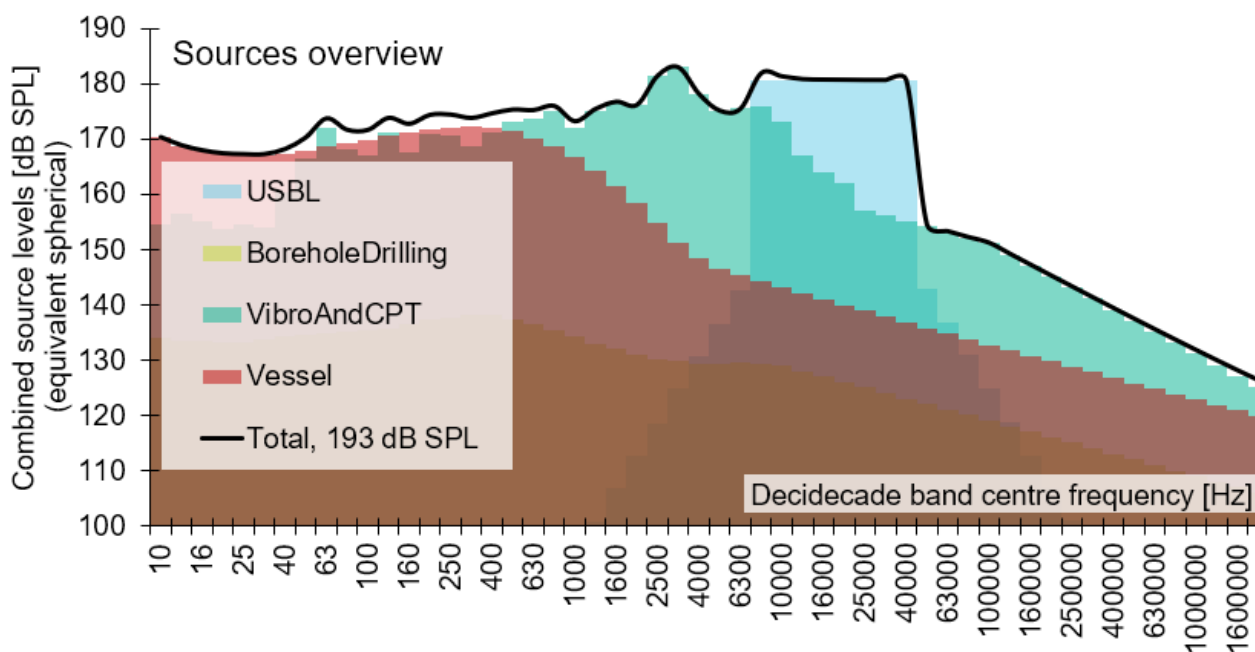


Figure 4-22. Source band level during geotechnical survey.

Subsea Noise Technical Report

4.1.2.7 Soft Start Source (Geotechnical)

The vessel itself (modelled with DP system active, but with no active USBL) will perform the function of soft start source. Total broadband level of 183 dB SPL.

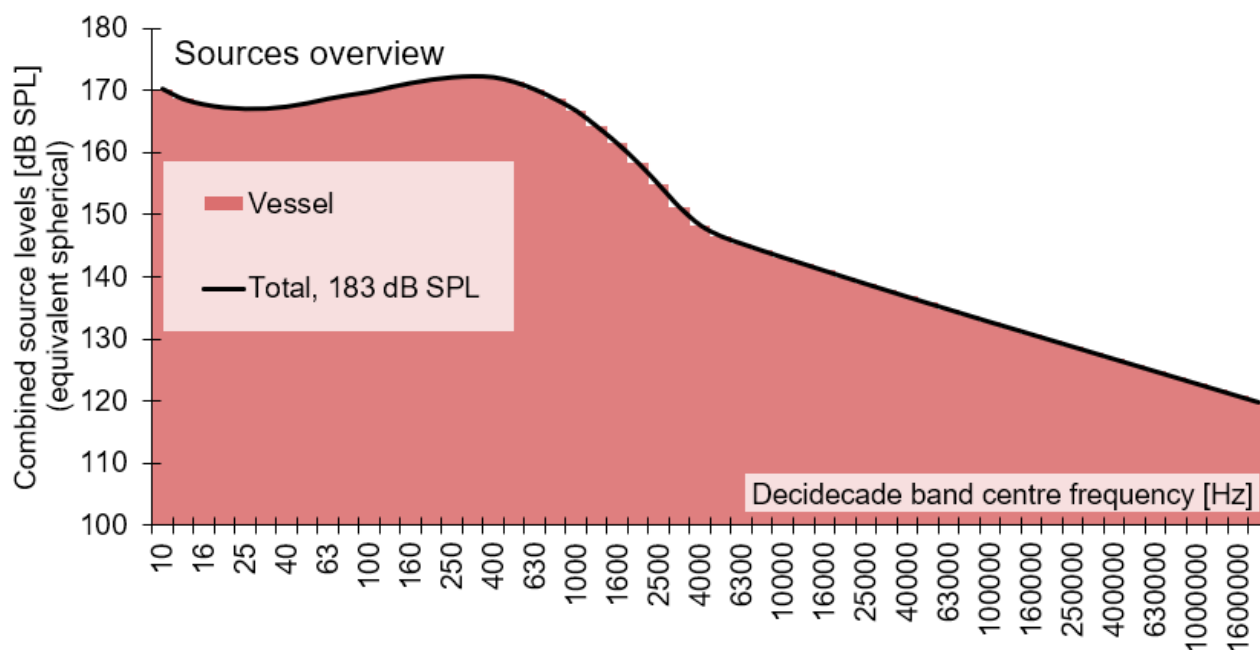


Figure 4-23. Source band level during geotechnical survey soft start.

4.1.2.8 ADCP

The ADCP systems deployed either on metocean buoys or on the seabed have been considered separately. Total broadband level of 207 dB SPL.

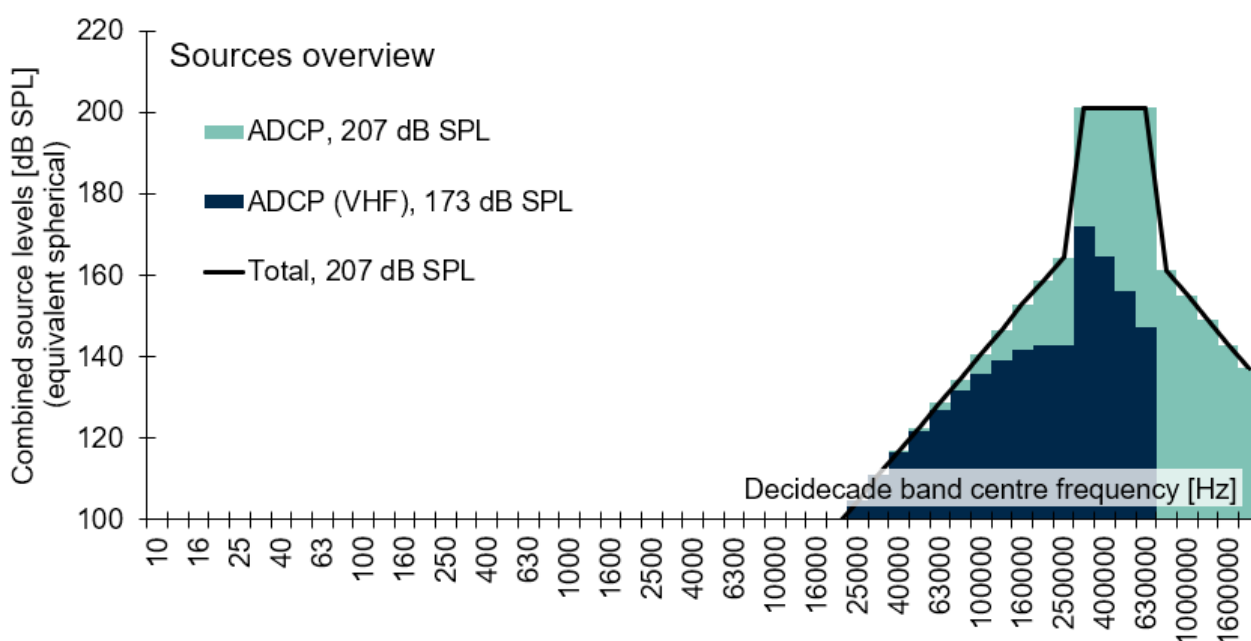


Figure 4-24. Source band level of ADCP (green) and for the ADCP when weighted for the VHF hearing group (blue).

5 SOUND PROPAGATION MODELLING METHODOLOGY

There are several methods available for modelling the propagation of sound between a source and receiver ranging from very simple models which simply assume spreading according to a $10 \cdot \log_{10}(\text{range})$ or $20 \cdot \log_{10}(\text{range})$ relationship, to full acoustic models (e.g., ray tracing, normal mode, parabolic equation, wavenumber integration and energy flux models). In addition, semi-empirical models are available which lie somewhere in between these two extremes in terms of complexity (e.g., (Rogers, 1981; Weston, 1971))⁸.

For simpler scenarios, such as this one, where the sediment is relatively uniform and mostly flat or where great detail in the sound field is not needed, the speed of these simpler models is preferred over the higher accuracy of numerical models and are routinely used for these types of assessments. For this assessment, we have used the “Roger’s” model (Rogers, 1981) which is suitable to depths of c. 200 m and generally softer sediments.

This model will tend to underestimate the transmission losses (leading to estimates greater than actual impact), primarily due to the omission of surface roughness, wind effects and shear waves in the sediment.

5.1 Modelling Assumptions

The main assumptions used in the modelling are:

1. Animals fleeing the area will not return within a 24-hour period.
2. Animals flee for up to 2 hours, after which they will be up to 10.8 km and 3.6 km away for marine mammals and fish, respectively.
3. A soft start where no SBP and no USBL is active, but MBES and/or SSS is active (section 4.1.2.5) is a feasible and practical option for the survey operator. This gives the VHF group a c. 9-18 dB reduction in received level for the duration of the soft start, depending on exact equipment configuration.
4. Results assume a transition from impulsive (kurtosis >40) to non-impulsive (kurtosis <40) at some distance from the source (source, sediment and depth dependant). This means that for the sparker and boomer SBP, at ranges greater than 500-3300 m the received noise will have become non-impulsive, while for the remaining sources this transition occurs at 20-200 m range from the source. After the transition to non-impulsive noise the noise is assessed against the non-impulsive thresholds.

This assumption is also applicable for the assessment of behavioural disturbance.

5.2 Exposure Calculations (dB SEL)

To compare modelled levels with the two impact assessment frameworks (NOAA 2024 & Popper et al. 2014) it is necessary to calculate received levels as exposure levels (SEL), weighted for marine mammals and unweighted for fishes. For ease of implementation, sources have generally been converted to an SPL source level, meaning converting to SEL from SPL or from a number of events.

To convert from SPL to SEL, the following relation can be used:

$$SEL = SPL + 10 \cdot \log_{10}(t_2 - t_1) \quad (1)$$

Or, where it is inappropriate to convert SEL from one event to SEL cumulative by relating to the number of events as:

$$SEL_{n \text{ events}} = SEL_{\text{single event}} + 10 \cdot \log_{10}(n) \quad (2)$$

⁸ This model is compared to measurements in the paper (Rogers, 1981) describing it and is capable of accurate modelling in acoustically simpler scenarios. Simpler meaning shallow in relation to the wavelengths and with no significant sound speed gradient in the water column.

Subsea Noise Technical Report

And SPL from SEL:

$$SPL = SEL_{single\ event} + 10 \cdot \log_{10} \left(\frac{n}{t_2 - t_1} \right) \quad (3)$$

As an animal swims away from the sound source, the noise it experiences will become progressively more attenuated; the cumulative, fleeing SEL is derived by logarithmically adding the SEL to which the mammal is exposed as it travels away from the source. This calculation is used to estimate the approximate minimum start distance for an animal in order for it to be exposed to sufficient sound energy to result in the exceedance of a threshold, or to check if a set exclusion zone is sufficient for an activity (e.g. will an exclusion zone of 500 m be sufficient to prevent exceeding an AUD INJ threshold). It should be noted that the sound exposure calculations are based on the simplistic assumption that the animal will continue to swim away at a constant speed. The real-world situation is more complex, and the animal is likely to move in a more varied manner. Reported swim speeds are summarised in Table 5-1 along with the source papers for the assumptions.

For this assessment, we used a swim speed of 1.5 m/s for marine mammals, and 0.5 m/s for fishes (including sharks).

For very long fleeing durations, the ambient sound itself can exceed the thresholds, e.g., an ambient sound level of 122.4 dB, weighted for the VHF group, will exceed the non-impulsive TTS threshold of 161 dB SEL after 2 hours' exposure⁹. For this assessment, we consider fleeing durations of 2 hours (7200 seconds, allowing 10800 m of fleeing), meaning that weighted levels of 122.4 dB SPL will exceed the VHF group's non-impulsive TTS threshold in the fleeing model.

Table 5-1: Swim speed examples from literature

Species	Hearing Group	Swim Speed (m/s)	Source Reference
Harbour porpoise	VHF	1.5	Otani <i>et al.</i> , 2000
Harbour seal	PCW	1.8	Thompson, 2015
Grey seal	PCW	1.8	Thompson, 2015
Minke whale	LF	2.3	Boisseau <i>et al.</i> , 2021
Bottlenose dolphin	HF	1.52	Bailey and Thompson, 2010
White-beaked dolphin	HF	1.52	Bailey and Thompson, 2010
Basking shark	Fish (unweighted)	1.0	Sims, 2000
All other fish groups	Fish (unweighted)	0.5	Popper <i>et al.</i> , 2014
Sea turtles	Fish (unweighted)	0.56-0.84 & 0.78-2.8	(F, et al., 1997; SA, 2002)

⁹ 122.4 dB SPL + 10*log₁₀(3600 seconds) = 161 dB SEL, TTS non-impulsive threshold for the VHF group is 161 dB SEL.

6 RESULTS AND ASSESSMENT

Results are presented here as the geographical “risk range” to an auditory threshold (AUD INJ/ TTS/ Behavioural), as given in Sections 2.3 and 2.5. A given risk range specifies the expected range, within which, a receiver would exceed the relevant threshold. Risk ranges are given for the 90th percentile value.

Several result types are presented for each activity to inform this assessment and to provide flexibility in mitigation:

1. **“1 second exposure risk range”:**
This is the range of acute risk of impact from the activity (a one second exposure) and is presented to indicate instantaneous risk and for comparison with other studies. This assumes a stationary animal (during the 1-second exposure) with all equipment operating at full power and does not include a soft start.
2. **“Minimal starting range for a fleeing animal with no soft start”:**
The minimal range a fleeing animal needs to start fleeing from to avoid being exposed to noise exceeding its TTS/AUD INJ threshold. Animals are moving in a straight line away from the source at a constant speed of 1.5 m/s (0.5 m/s for fish, including sharks).
3. **“Minimal starting range for a fleeing animal with a 20 min soft start with no SBP and no USBL active”:**
The minimal range a fleeing animal needs to start fleeing from to avoid being exposed to noise exceeding its TTS/ AUD INJ threshold. Animals are moving in a straight line away from the source at a constant speed of 1.5 m/s (0.5 m/s for fish, including sharks).
4. **“Minimal starting range for a fleeing animal with a 30 min soft start with no SBP and no USBL active”:**
The minimal range a fleeing animal needs to start fleeing from to avoid being exposed to noise exceeding its TTS/ AUD INJ threshold. Animals are moving in a straight line away from the source at a constant speed of 1.5 m/s (0.5 m/s for fish, including sharks).
5. **“Behavioural response range”:**
The range at which the behavioural limit for the marine mammals (160/120 dB SPL impulsive/non-impulsive) or the fishes (including sharks) (150 dB SPL) is exceeded. No hearing group weightings are applied when assessing against this threshold.

6.1 Assumptions and Notes on Results

The results should be read while keeping the following in mind:

- Results are rounded to the nearest two significant digits. This can lead to some curious appearing overlaps in risk ranges.
- The modelling resolution of ten metres means that where results are lower than this “<10” is stated to mean “below ten metres”.
- Where risk ranges are large (often the case for TTS risk ranges), an increase in soft start duration will not be effective to lower the TTS risk range. This is due to the logarithmic nature of transmission losses:

For a marine mammal that starts fleeing at 500 m range:

- Increasing the soft start from 0 to 10 minutes allows a marine mammal to swim an additional 900 m (1.5 m/s * 600 sec), from 500 m range to 1400 m range.
This results in a c. 6.5 dB reduction in received level for the animal.
- Increasing the soft start from 10 to 20 minutes allows the animal to swim an additional 900 m, from 1400 m range to 2300 m range.
This results in a c. 3.5 dB reduction in received level for the animal.
- And for 20 to 30 minutes (2300 to 3200 m), the reduction is c. 2 dB.
- As the impulsive noise transitions to non-impulsive noise with increased ranges, the appropriate behavioural threshold for the assessment changes from 160 dB to 120 dB (a likely 10-fold increase in

Subsea Noise Technical Report

range). This means that there are large ranges of disturbance, but should be considered in relation to, for example, the radiated noise from common vessels, which will exceed this threshold to ranges of 500-10000 m (assuming 160-180 dB SPL source level).

- Animals are modelled as fleeing in straight lines. Where sites are very confined, the maximal risk ranges will be restricted by line-of-sight ranges (and cut short where they meet land).
- Modelling assumed a maximal fleeing time of 7200 seconds (2 hours). This allows for 10.8 km of fleeing for marine mammals (3.6 km for fish).
- Modelling is limited to a range of 20 km from the source.
- No modelling of risk ranges for *mortality* for fishes are presented, as risk ranges to AUD INJ (recoverable injury) are all smaller than 30 m.
- No results are presented for assessment against the L_P thresholds as, for all scenarios, the risk ranges to the TTS thresholds were <120 m for fish (TTS: 193 dB L_P) and <100 m for marine mammals (VHF TTS: 196 dB L_P). AUD INJ risk ranges are <10 m for all hearing groups.
- Results are *only* given in relation to the behavioural thresholds (SPL) and TTS/ AUD INJ thresholds for sound exposure level (SEL).
- The hearing group “Fish” includes sharks and are for unweighted received levels assessed against the lowest thresholds for fishes as found in guidance (Popper, et al., 2014). This also means that very high frequency sources (MBESs or ADCP), which the fish cannot detect, can lead to significant risk ranges – this is a consequence of a lack of an agreed frequency weighting for fish, not an indication that fish can be injured by these.
- Given the large difference in behavioural thresholds between marine mammals and fish, 120 dB versus 150 dB, counterintuitive effects can arise due to the mechanics of sound propagation:

Higher frequencies generally are absorbed less by the sediment but experience higher absorption. This leads to relatively lower transmission loss near the source, but higher transmission loss further away. Lower frequencies will be absorbed more by the sediment near the source but experience less transmission loss due to absorption. This leads to relatively higher initial transmission loss for lower frequencies with lower transmission loss at longer ranges. This can mean that a lower frequency sound will drop below 150 dB SPL (fishes’ threshold) quickly but remain above 120 dB SPL (marine mammal threshold) up to long ranges, leading to vary large differences in the behavioural threshold exceedance ranges.

Conversely, higher frequency sound, will tend to drop below 150 dB SPL slower, with a comparatively faster continued loss to 120 dB SPL, resulting in more similar ranges for behavioural threshold exceedance.

6.2 Results – Tabulated

6.2.1 Geophysical Survey

For all geophysical survey results, the vessel, the SSS, the USBL and the MBES sources are active. Only the type of SBP is changing between the scenarios modelled.

6.2.1.1 Parametric SBP (P-SBP)

This scenario assumes that the geophysical survey is using a parametric SBP (Section 4.1.2.1).

6.2.1.1.1 Injury

Risk ranges for exceeding AUD INJ (Table 6-1) are below 30 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 250 m with no soft start.

A soft start of 20 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to <10 m.

Subsea Noise Technical Report

Table 6-1. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (Parametric SBP).

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	310	<10	<10	<10
Fleeing receiver, no soft start	<10	20	250	20	<10	30
Fleeing receiver, 20 min soft start	<10	<10	<10	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	<10	<10	<10	<10

6.2.1.1.2 TTS

Risk ranges for exceeding TTS (Table 6-2) is below 440 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 3700 m with no soft start.

For the VHF group, a soft start of 20minutes reduces the TTS risk range to 2500 while a soft start of 30 minutes reduces the TTS risk range to 2300 m. Further increasing the soft start duration will have diminishing effects on the reduction in TTs risk range.

Table 6-2: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (Parametric SBP).

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	30	660	40	10	30
Fleeing receiver, no soft start	120	200	3700	440	150	150
Fleeing receiver, 20 min soft start	<10	<10	2500	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	2300	<10	<10	<10

6.2.1.1.3 Behavioural

The range to exceedance of the behavioural thresholds (Table 6-3) are exceeded to 10 km for marine mammals and 660 m for fishes.

Table 6-3: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (Parametric SBP).

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	10000	10000	10000	10000	10000	660

6.2.1.2 Chirper/Pinger SBP (C-SBP)

This scenario assumes that the geophysical survey is using a chirper/pinger SBP (Section 4.1.2.2).

6.2.1.2.1 Injury

Risk ranges for exceeding AUD INJ (Table 6-4) is below 20 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 180 m with no soft start.

Subsea Noise Technical Report

A soft start of 20 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to <10 m.

Table 6-4. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	140	<10	<10	<10
Fleeing receiver, no soft start	<10	<10	180	20	<10	<10
Fleeing receiver, 20 min soft start	<10	<10	<10	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	<10	<10	<10	<10

6.2.1.2.2 TTS

Risk ranges for exceeding TTS (Table 6-5) is below 690 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 4100 m with no soft start.

A soft start of 20 minutes reduces the TTS risk range to <10 m for all groups except the VHF group.

For the VHF group, a soft start of 20 minutes reduces the TTS risk range to 2900 while a soft start of 30 minutes reduces the TTS risk range to 2300 m. Further increasing the soft start duration will have diminishing effects on the reduction in TTs risk range.

Table 6-5: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	10	<10	600	30	10	<10
Fleeing receiver, no soft start	230	150	4100	690	200	30
Fleeing receiver, 20 min soft start	<10	<10	2900	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	2300	<10	<10	<10

6.2.1.2.3 Behavioural

The range to exceedance of the behavioural thresholds (Table 6-6) are exceeded to 16 km for marine mammals and 620 m for fishes.

Table 6-6: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (chirper/pinger SBP).

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	16000	16000	16000	16000	16000	620

Subsea Noise Technical Report

6.2.1.3 Sparker/UHRS (S-SBP)

This scenario assumes that the geophysical survey is using a sparker SBP / UHRS (Section 4.1.2.3).

6.2.1.3.1 Injury

Risk ranges for exceeding AUD INJ (Table 6-7) is below 50 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 2100 m with no soft start.

A soft start of 20 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to 860 m and the remaining groups to <10 m.

A soft start of 30 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to 310 m.

Table 6-7. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	130	<10	<10	<10
Fleeing receiver, no soft start	30	<10	2100	50	20	<10
Fleeing receiver, 20 min soft start	<10	<10	860	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	310	<10	<10	<10

6.2.1.3.2 TTS

Risk ranges for exceeding TTS (Table 6-8) is below 1200 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 3800 m with no soft start.

A soft start of 30 minutes reduces the TTS risk range to <10 m for all groups except the VHF group.

For the VHF group, a soft start of 20 minutes reduces the TTS risk range to 2600 m while a soft start of 30 minutes reduces the TTS risk range to 2000 m. Further increasing the soft start duration will have diminishing effects on the reduction in TTS risk range.

Table 6-8: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	20	<10	940	30	10	<10
Fleeing receiver, no soft start	900	230	3800	1200	610	120
Fleeing receiver, 20 min soft start	<10	<10	2600	60	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	2000	<10	<10	<10

6.2.1.3.3 Behavioural

The range to exceedance of the behavioural thresholds (Table 6-9) are exceeded to 19 km for marine mammals and 630 m for fishes.

Subsea Noise Technical Report

Table 6-9: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (sparker SBP/UHRS).

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	19000	19000	19000	19000	19000	630

6.2.1.4 Boomer SBP (B-SBP)

This scenario assumes that the geophysical survey is using a boomer SBP (Section 4.1.2.4).

6.2.1.4.1 Injury

Risk ranges for exceeding AUD INJ (Table 6-10) is below 70 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 2200 m with no soft start.

A soft start of 20 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to 970 m and the remaining groups to <10 m.

A soft start of 30 minutes or more will allow sufficient time for the VHF group to swim away to reduce the AUD INJ exceedance risk range to 390 m.

Table 6-10. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during Geophysical survey (boomer SBP).

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	140	<10	<10	<10
Fleeing receiver, no soft start	40	<10	2200	70	30	<10
Fleeing receiver, 20 min soft start	<10	<10	970	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	390	<10	<10	<10

6.2.1.4.2 TTS

Risk ranges for exceeding TTS (Table 6-11) is below 1200 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 4300 m with no soft start.

A soft start of 30 minutes reduces the TTS risk range to <10 m for all groups except the VHF group.

For the VHF group, a soft start of 20 minutes reduces the TTS risk range to 3100 m while a soft start of 30 minutes reduces the TTS risk range to 2500 m. Further increasing the soft start duration will have diminishing effects on the reduction in TTS risk range.

Table 6-11: Risk ranges for exceeding the TTS threshold for all hearing groups during Geophysical survey (boomer SBP).

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	30	<10	980	40	20	<10
Fleeing receiver, no soft start	1200	290	4300	1500	800	140
Fleeing receiver, 20 min soft start	130	<10	3100	270	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	2500	<10	<10	<10

Subsea Noise Technical Report

6.2.1.4.3 Behavioural

The range to exceedance of the behavioural thresholds (Table 6-12) are exceeded to 19 km for marine mammals and 720 m for fishes.

Table 6-12: Risk ranges for exceeding the behavioural threshold for all hearing groups during Geophysical survey (boomer SBP).

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	19000	19000	19000	19000	19000	720

6.2.2 Geotechnical Survey

This scenario assumes the equipment related to the geotechnical survey is active (Section 4.1.2.6).

Note that the soft start for this activity is the vessel itself, so if the vessel is active (using main or DP thrusters) this can be considered part of the soft start.

6.2.2.1 Borehole drilling, Vibro-cores and CPT

6.2.2.1.1 Injury

Risk ranges for exceeding AUD INJ (Table 6-13) is below 20 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 180 m with no soft start.

Table 6-13. Risk ranges for exceeding the AUD INJ threshold for all hearing groups during the geotechnical survey.

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	130	<10	<10	<10
Fleeing receiver, no soft start	<10	<10	180	20	<10	<10
Fleeing receiver, 20 min soft start	<10	<10	<10	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	<10	<10	<10	<10

6.2.2.1.2 TTS

Risk ranges for exceeding TTS (Table 6-14) is below 550 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 3800 m with no soft start.

A soft start of 20 minutes reduces the TTS risk range to <10 m for all groups except the VHF group.

For the VHF group, a soft start of 20 minutes reduces the TTS risk range to 2600 while a soft start of 30 minutes reduces the TTS risk range to 2000 m. Further increasing the soft start duration will have diminishing effects on the reduction in TTS risk range.

Subsea Noise Technical Report

Table 6-14: Risk ranges for exceeding the TTS threshold for all hearing groups during the geotechnical survey.

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	10	<10	560	30	10	<10
Fleeing receiver, no soft start	180	130	3800	550	170	30
Fleeing receiver, 20 min soft start	<10	<10	2600	<10	<10	<10
Fleeing receiver, 30 min soft start	<10	<10	2000	<10	<10	<10

6.2.2.1.3 Behavioural

The range to exceedance of the behavioural thresholds (Table 6-15) are exceeded to 14 km for marine mammals and 580 m for fishes.

Table 6-15: Risk ranges for exceeding the behavioural threshold for all hearing groups during the geotechnical survey.

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	14000	14000	14000	14000	14000	580

6.2.3 ADCP

This scenario assumes the ADCP source is active (Section 4.1.2.8).

Risk ranges for exceeding AUD INJ (Table 6-16) is below 20 m for all groups except the VHF group, which risks exceeding the AUD INJ threshold to a range of 40 m.

Note that this source might be switched on with no soft start, meaning the soft start scenario will only be realised if the ADCP is switched on while the vessel has been nearby for over 20 minutes.

Table 6-16. Risk ranges for exceeding the AUD INJ threshold for all hearing groups of the ADCP.

AUD INJ Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	<10	<10	<10	<10
Fleeing receiver, no soft start	<10	<10	40	<10	<10	20
Fleeing receiver, 20 min soft start	<10	<10	<10	<10	<10	<10

The TTS exceedance risk range are up to 100 m for the VHF group, 70 m for the fishes and less than 10 m for the remaining groups (Table 6-16 and Table 6-17).

Note that fishes generally cannot hear above 10 kHz, so these ranges are more a result of the guidance having no mechanism for weighting the received noise, than actual impact risk.

Subsea Noise Technical Report

Table 6-17: Risk ranges for exceeding the TTS threshold for all hearing groups of the ADCP.

TTS Threshold Exceedance Risk ranges (SEL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
One second	<10	<10	50	<10	<10	20
Fleeing receiver, no soft start	<10	<10	100	<10	<10	70
Fleeing receiver, 20 min soft start	<10	<10	<10	<10	<10	<10

Behavioural threshold exceedance ranges are 440 for marine mammals and 200 for fishes (Table 6-18).

Note that to account for the fact that the ADCPs main output is above 300 kHz and that most animals cannot hear it, we have included the behavioural ranges after adjusting for the hearing sensitivity of the receivers. With this adjustment, the ADCP is below the behavioural threshold for all groups <10 m from the source.

Table 6-18: Risk ranges for exceeding the behavioural threshold for all hearing groups of the ADCP.

Behavioural Threshold exceedance Risk ranges (SPL thresholds)	LF [m]	HF [m]	VHF [m]	PCW [m]	OCW [m]	Fish [m]
Non-impulsive	440	440	440	440	440	200
<i>Weighted for hearing groups.</i>	<10	<10	<10	<10	<10	<10

6.3 Results Summary

6.3.1 Geophysical Survey

6.3.1.1 Parametric and Chirper/Pinger (P-SBP & C-SBP)

AUD INJ – hearing injury

Apart from the VHF hearing group, all risk ranges to AUD INJ exceedance for fleeing receivers are below 30 m with no soft start.

For the VHF group, no soft start risks AUD INJ to 250 m.

With a 20-minute soft start the risk range for AUD INJ to <10 m for all hearing groups.

TTS – temporary hearing impairment

Apart from the VHF hearing group, all risk ranges to TTS exceedance for fleeing receivers are below 690 m with no soft start.

For the VHF group, no soft start risks TTS to 4100 m.

With a 20-minute soft start the risk range for TTS for the VHF group is reduced to 2900 m, and to <10 m for the remaining groups.

With a 30-minute soft start the risk range for TTS for the VHF group is reduced to 2300 m, and to <10 m for the remaining groups.

Behavioural disturbance

Ranges for behavioural disturbance are up to 16 km for marine mammals and 620 m for fishes.

6.3.1.2 Sparker and Boomer (S-SBP & B-SBP)

AUD INJ – hearing injury

Apart from the VHF hearing group, all risk ranges to AUD INJ exceedance for fleeing receivers are below 70 m with no soft start.

For the VHF group, no soft start risks AUD INJ to 2200 m.

With a 20-minute soft start the risk range for AUD INJ for the VHF group is reduced to 970 m, and to <10 m for the remaining groups.

With a 30-minute soft start the risk range for AUD INJ for the VHF group is reduced to 390 m.

TTS – temporary hearing impairment

Apart from the VHF hearing group, all risk ranges to TTS exceedance for fleeing receivers are below 1500 m with no soft start.

For the VHF group, no soft start risks TTS to 4300 m.

With a 20-minute soft start the risk range for TTS for the VHF group is reduced to 3100 m, and to 270 m for the remaining groups.

With a 30-minute soft start the risk range for TTS for the VHF group is reduced to 2500 m, and to <10 m for the remaining groups.

Behavioural disturbance

Ranges for behavioural disturbance are up to 19 km for marine mammals and 720 m for fishes.

6.3.2 Geotechnical Survey

AUD INJ – hearing injury

Apart from the VHF hearing group, all risk ranges to AUD INJ exceedance for fleeing receivers are below 20 m with no soft start.

For the VHF group, no soft start risks AUD INJ to 180 m.

With a 20-minute soft start the risk range for AUD INJ to <10 m for all hearing groups.

TTS – temporary hearing impairment

Apart from the VHF hearing group, all risk ranges to TTS exceedance for fleeing receivers are below 550 m with no soft start.

For the VHF group, no soft start risks TTS to 3800 m.

With a 20-minute soft start the risk range for TTS for the VHF group is reduced to 2600 m, and to <10 m for the remaining groups.

With a 30-minute soft start the risk range for TTS for the VHF group is reduced to 2000 m, and to <10 m for the remaining groups.

Behavioural disturbance

Ranges for behavioural disturbance are up to 14 km for marine mammals and 580 m for fishes.

6.3.3 ADCP

AUD INJ – hearing injury

Apart from the VHF hearing group, all risk ranges to AUD INJ exceedance for fleeing receivers are under 20 m with no soft start.

For the VHF group, the risks of AUD INJ extend to 40 m.

If the ADCP is switched on while the vessel has been nearby for over 20 minutes, this will act as a soft start to reduce the risk of AUD INJ to <10 m for all hearing groups.

Subsea Noise Technical Report

TTS – temporary hearing impairment

Apart from the VHF hearing group, all risk ranges to TTS exceedance for fleeing receivers are below 70 m with no soft start.

For the VHF group, the risk of TTS extends to 100 m.

If the ADCP is switched on while the vessel has been nearby for over 20 minutes, this will act as a soft start to reduce the risk of TTS to <10 m for all hearing groups.

Behavioural disturbance

Ranges for behavioural disturbance are up to 440 m, when applying the criterion strictly (unweighted), however, given the ADCPs main energy is above 300 kHz (outside the hearing range of the receivers) we have also included the behavioural disturbance ranges while accounting for the receivers' hearing capabilities.

Accounting for the frequency dependent sensitivity of the receivers, the behavioural disturbance range decreases to <10 m for all groups.

7 CONCLUSIONS

This report has modelled equipment and vessels to be used in undertaking the marine geophysical and geotechnical surveys that form part of the SI works within the AoI of this MUL application. For modelling purposes it has been assumed that only one marine geophysical or geotechnical survey occurs at any one time within the ensonified area modelled.

There is risk of inducing hearing injury (AUD INJ – auditory injury) following noise from the SI Works, but with the implementation of soft starts, these distances will be minimised efficiently to make the risks of auditory injury low for all hearing groups assessed (fish and marine mammals).

There is risk of inducing temporary hearing effects (TTS – Temporary Threshold Shift). During geophysical survey, this extends to c. 4.3 km for the VHF group (harbour porpoise) and below c. 1.5 km for remaining marine mammals and fishes. Introducing a 20-minute soft start to the geophysical surveys, where only some equipment is active, will reduce the risk of TTS for the VHF group to within 3.1 km, and to below 270 m for the remaining marine mammals and fishes.

Behavioural disturbance ranges of up to 19 km have been identified during the geophysical survey for marine mammals for the worst-case scenario which is while the sparker or boomer type SBP is active.

For the geotechnical survey, the use of a USBL means that behavioural disturbance for marine mammals ranges up to 14 km under the worst-case scenario.

The ADCP will have minor risk of AUD INJ for the VHF group (up to 40 m), but otherwise no acoustic impact.

8 REFERENCES

- Ainslie Michael A.** Principles of Sonar Performance Modeling [Book]. - Heidelberg : Springer, 2010.
- ANSI S1.13-2005** Measurement of Sound Pressure Levels in Air. - [s.l.] : American National Standards Institute, 2005.
- ANSI S12.7-1986** Method for Measurement of Impulsive Noise. - [s.l.] : American National Standards Institute, 1986.
- ANSI S3.20-1995** Bioacoustical Terminology. - [s.l.] : American National Standards Institute, 1995.
- Benhemma-Le Gall A Graham IM, Merchant ND and Thompson PM** Broad-Scale Responses of Harbor Porpoises to Pile-Driving and Vessel Activities During Offshore Windfarm Construction [Journal]. - [s.l.] : Frontiers in Marine Science, 2021. - 664724 : Vol. 8.
- BOOTH C.G., HARWOOD, J., PLUNKETT, R, MENDES, S, & WALKER, R.** Using the Interim PCoD framework to assess the potential impacts of offshore wind developments in Eastern English Waters on harbour porpoises in the North Sea [Report]. - [s.l.] : Natural England, 2017.
- Brandon L. Southall Ann E. Bowles, William T. Ellison, James J. Finneran, Roger L. Gentry, Charles R. Greene Jr., David Kastak, Darlene R. Ketten, James H. Miller, Paul E. Nachtigall, W. John Richardson, Jeanette A. Thomas, & Peter L. Tyack** Marine Mammal Noise Exposure Criteria: Initial Scientific Recommendations [Report]. - [s.l.] : Aquatic Mammals, 2007.
- British Geological Survey** Geology Viewer [Online] // British Geological Survey. - 11 05 2023. - 11 05 2023. - <https://geologyviewer.bgs.ac.uk>.
- Burnham Rianna [et al.]** Spatial Impact of Recreational-Grade Echosounders and the Implications for Killer Whales [Journal]. - Sidney : J. Mar. Sci Eng., 2022. - 1267 : Vol. 10.
- Department of Arts, Heritage and the Gealtacht** Guidance to Manage the Risk to Marine Mammals from Man-made Sound in Irish Waters [Report]. - [s.l.] : Department of Arts, heritage and the Gealtacht, 2014.
- EPA** Guidelines on the information to be Contained in Environmental Impact Assessment Reports [Report]. - Wexford : EPA, 2022.
- Erbe Christina and McPherson Craig** Underwater noise from geotechnical drilling and standard penetration testing [Journal] // Journal of the Acoustical Society of America. - 2017.
- European Commision** European Marine Observation and Data Network (EMODnet) [Online] // EMODnet Product Catalogue. - 27 02 2024. - 27 02 2024. - <https://emodnet.ec.europa.eu/geonetwork/srv/eng/catalog.search#/home>.
- F Papi [et al.]** Satellite tracking experiments on the navigational ability and migratory behaviour of the loggerhead turtle caretta caretta. [Journal]. - [s.l.] : Marine Biology, 1997. - 129:215-220.
- Finneran James j.** Marine mammal auditory weighting functions and exposure functions for US Navy Phase 4 acoustic effects analyses [Report]. - [s.l.] : NOAA, 2024.
- Fisheries and Marine Service** Underwater Noise at an Offshore Drilling Operation in the Bay of Fundy [Report]. - [s.l.] : Environment Canada, 1975.
- Graham IM Merchant ND, Farcas A, Barton TR, Cheney B, Bono S, Thompson PM.** Harbour porpoise responses to pile-driving diminish over time [Journal]. - [s.l.] : Royal Society Open Science, 2019. - 190335 : Vol. 6.
- Heitmeyer Stephen C. Wales and Richard M.** An ensemble source spectra model for merchant ship-radiated noise [Journal]. - Washington : Naval Research Laboratory, 2001.
- JNCC** JNCC guidelines for minimising the risk of injury to marine mammals from geophysical surveys [Report]. - [s.l.] : Joint Nature Conservation Committee, 2017.

Subsea Noise Technical Report

JNCC Statutory nature conservation agency protocol for minimising the risk of injury to marine mammals from piling noise [Report]. - [s.l.] : Joint Nature Conservation Committee, 2010.

Jong Christ de [et al.] Underwater noise of Trailing Suction Hopper Dredgers at Maasclakte 2: Analysis of source levels and background noise [Report]. - [s.l.] : TNO, 2010.

L-F Huang [et al.] Underwater noise characteristics of offshore exploratory drilling and its impact on marine mammals. [Journal]. - [s.l.] : Frontiers in Marine Science, 2023.

MR Willis [et al.] Noise Associated with Small Scale Drilling Operations [Conference] // 3rd International Conference on Ocean Energy, 6 October. - Bilbao : [s.n.], 2010.

National Marine Fisheries Service Scoping report for NMFS EIS for the National Acoustic Guidelines on Marine Mammals [Report]. - [s.l.] : National Marine Fisheries Service, 2005.

National Oceanic and Atmospheric Administration 2024 Update to: Technical Guidance for Assessing the Effects of Anthropogenic Sound on Marine Mammal Hearing (Version 3.0) [Report]. - Silver Spring : National Marine Fisheries Service, 2024.

Nedwell Dr. J.R. [et al.] Fish and Marine Mammal Audiograms: A summary of available information [Report]. - 2004.

NIOSH Criteria for a Recommended Standard: Occupational Noise Exposure. - [s.l.] : National Institute for Occupational Safety and Health, 1998.

Popper A. N. [et al.] Sound Exposure Guidelines for Fishes and Sea Turtles [Report]. - [s.l.] : Springer, 2014.

Reine Kevin J., Clarke Douglas and Dickerson Charles Characterization of Underwater Sounds Produced by a Hydraulic Cutterhead Dredge Fracturing Limestone Rock [Report]. - [s.l.] : DOER, 2021.

Reiser [et al.] Marine Mammal Monitoring and Mitigation During Marine Geophysical Surveys by Shell Offshore, Inc. in the Alaskan Chukchi and Beaufort Seas [Report]. - [s.l.] : LGL Alaska Research Associates, 2010.

Robinson S P [et al.] Measurement of noise arising from marine aggregate dredging operations [Report]. - [s.l.] : MALSF, 2011.

Rogers P. H. Onboard Prediction of Propagation Loss in Shallow Water [Report]. - Washington DC : Naval Research Laboratory, 1981.

SA Eckert Swim speed and movement patterns of gravid leatherback sea turtles(*Dermochelys coriacea*) at St Croix, US Virgin Islands [Journal]. - [s.l.] : Croix, US Virgin Islands, 2002. - 205:3689-3697.

Sarnocińska J Teilmann J, Balle JD, van Beest FM, Delefosse M and Tougaard J Harbor Porpoise (*Phocoena phocoena*) Reaction to a 3D Seismic Airgun Survey in the North Sea [Journal]. - [s.l.] : Frontiers in Marine Science, 2020. - 824 : Vol. 6.

Simard Yvan, RoyCédric Nathalie and Giard Gervaise Samuel Analysis and modeling of 255 source levels of merchant ships from an acoustic observatory along St. Lawrence Seaway [Journal]. - [s.l.] : journal of the Acoustical Society of America, 2016. - 2002 : Vol. 140.

Southall Brandon L. [et al.] Marine Mammal Noise Exposure Criteria: Updated Scientific Recommendations for Residual Hearing Effects [Journal]. - [s.l.] : Aquatic Mammals, 2019. - 2 : Vol. 45.

Weston D. E. Intensity-Range Relations in Oceanographic Acoustics [Report]. - Teddington : Admiralty Research Laboratory, 1971.

Wittekind Dietrich Kurt A Simple Model for the Underwater Noise Source Level of Ships [Journal]. - Schwentinental : DW-ShipConsult GmbH, 2014.

Worcester T. Effects of Seismic Energy on Fish; A Literature Review [Report]. - Dartmouth, Canada : Department of Fisheries and Oceans, Bedford Institute of Oceanography, 2006.

Subsea Noise Technical Report

WSDOT Washington State Department of Transport Biological Assessment Preparation for Transport Projects Advanced Training Manual, CH 7 [Report]. - [s.l.] : Washington State Department of Transport, 2020.

Appendix A – Acoustic Concepts and Terminology

Sound travels through water as vibrations of the fluid particles in a series of pressure waves. The waves comprise a series of alternating compressions (positive pressure variations) and rarefactions (negative pressure fluctuations). Because sound consists of variations in pressure, the unit for measuring sound is usually referenced to a unit of pressure, the Pascal (Pa). The unit usually used to describe sound is the decibel (dB) and, in the case of underwater sound, the reference unit is taken as 1 μPa , one micro-pascal, whereas airborne sound is usually referenced to a pressure of 20 μPa . To convert from a sound pressure level referenced to 20 μPa to one referenced to 1 μPa , a factor of $20 \log(20/1)$ i.e. 26 dB has to be added to the former quantity. Thus, a sound pressure of 60 dB re 20 μPa is the same as 86 dB re 1 μPa , although care also needs to be taken when converting from in air sound to in water sound levels due to the different sound speeds and densities of the two mediums resulting in a conversion factor of approximately 62 dB for comparing intensities (watt/m^2), see Table 8-1, below.

Table 8-1: Comparing sound quantities between air and water.

Properties	Constant intensity		Constant pressure	
	Air	Water	Air	Water
Speed of sound (C) [m/s]	340	1500	340	1500
Density (ρ) [kg/m^3]	1.293	1026	1.293	1026
Acoustic impedance ($Z=C \cdot \rho$) [$\text{kg}/(\text{m}^2 \cdot \text{s})$ or ($\text{Pa} \cdot \text{s})/\text{m}^3$]	440	1539000	440	1539000
Sound intensity ($I=p^2/Z$) [Watt/m^2]	1	1	22.7469	0.0065
Sound pressure ($p=(I \cdot Z)^{1/2}$) [Pa]	21	1241	100	100
Particle velocity (I/p) [m/s]	0.04769	0.00081	0.22747	0.00006
dB re 1 μPa^2	146.4	181.9	160.0	160.0
dB re 20 μPa^2	120.4	155.9	134.0	134.0
Difference dB re 1 μPa^2 & dB re 20 μPa^2	61.5		26.0	

All underwater sound pressure levels in this report are described in dB re 1 μPa^2 . In water, the sound source strength is defined by its sound pressure level in dB re 1 μPa^2 , referenced back to a representative distance of 1m from an assumed (infinitesimally small) point source. This allows calculation of sound levels in the far-field. For large, distributed sources, the actual sound pressure level in the near-field will be lower than predicted.

There are several descriptors used to characterise a sound wave. The difference between the lowest pressure deviation (rarefaction) and the highest pressure deviation (compression) from ambient is the peak to peak (or pk-pk) sound pressure (L_{P-P} for the level in dB). Note that L_{P-P} can be hard to measure consistently, as the maximal duration between the lowest and highest pressure deviation is not standardised. The difference between the highest deviation (either positive or negative) and the ambient pressure is called the peak pressure (L_P for the level in dB). Lastly, the average sound pressure is used as a description of the average amplitude of the variations in pressure over a specific time window (SPL for the level in dB). SPL is equal to the L_{eq} when the time window for the SPL is equal to the time window for the total duration of an event. The cumulative sound energy from pressure is the integrated squared pressure over a given period (SEL for the level in dB). These descriptions are shown graphically in Figure 8-1 and reflect the units as given in ISO 18405:2017, "Underwater Acoustics – Terminology".

Subsea Noise Technical Report

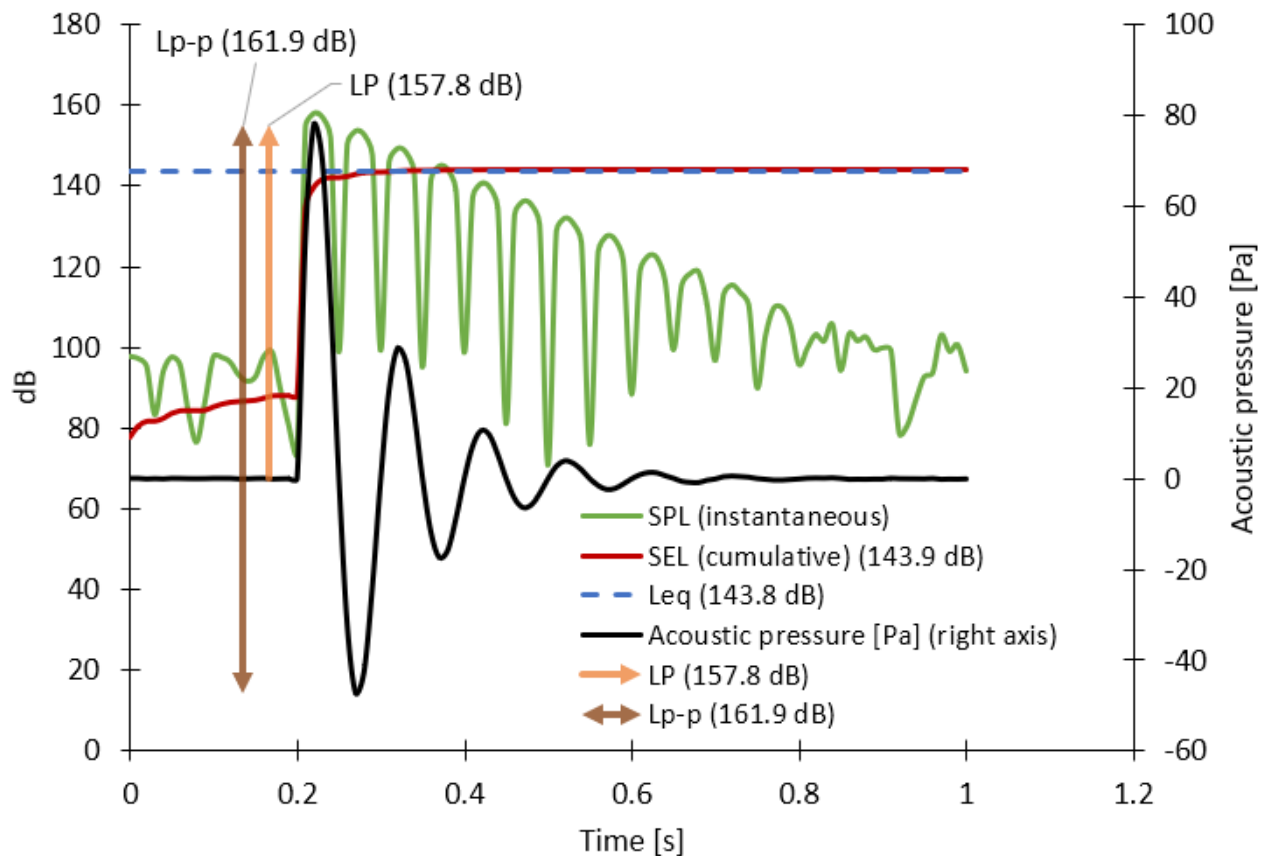


Figure 8-1: Graphical representation of acoustic wave descriptors.

The sound pressure level (SPL¹⁰) is defined as follows (ISO 18405:2017, 3.2.1.1):

$$SPL = 10 \cdot \log_{10} \left(\frac{\overline{p^2}}{1 \cdot 10^{-12} \text{Pa}} \right) \quad (1)$$

Here $\overline{p^2}$ is the arithmetic mean of the squared pressure values. Note that L_P is simply the instantaneous SPL (ISO 18405:2017, 3.2.2.1).

The peak sound pressure level, L_P , is the instantaneous decibel level of the maximal deviation from ambient pressure and is defined in (ISO 18405:2017, 3.2.2.1) and can be calculated as:

$$L_P = 10 \cdot \log_{10} \left(\frac{\max(p^2)}{1 \cdot 10^{-12} \text{Pa}} \right)$$

Another useful measure of sound used in underwater acoustics is the Exposure Level, or SEL. This descriptor is used as a measure of the total sound energy of a single event or a number of events (e.g. over the course of a day). This allows the total acoustic energy contained in events lasting a different amount of time to be compared on a like for like basis. Historically, use was primarily made of SPL and L_P metrics for assessing the potential effects of sound on marine life. However, the SEL is increasingly being used as it allows exposure duration and the effect of exposure to multiple events over e.g. a 24-hour period to be taken into account. The SEL is defined as follows (ISO 18405:2017, 3.2.1.5):

$$SEL = 10 \cdot \log_{10} \left(\frac{\int_{t_1}^{t_2} p(t)^2 dt}{1 \cdot 10^{-12} \text{Pa}} \right) \quad (2)$$

To convert from SEL to SPL the following relation can be used:

$$SEL = SPL + 10 \cdot \log_{10}(t_2 - t_1) \quad (3)$$

¹⁰ Equivalent to the commonly seen "RMS-level".

Subsea Noise Technical Report

Converting from a single event to multiple events for SEL:

$$SEL_{n \text{ events}} = SEL_{\text{single event}} + 10 \cdot \log_{10}(n) \quad (4)$$

The frequency, or pitch, of the sound is the rate at which these oscillations occur and is measured in cycles per second, or Hertz (Hz). When sound is measured in a way which approximates to how a human would perceive it using an A-weighting filter on a sound level meter, the resulting level is described in values of dB(A). However, the hearing faculties of marine mammals and fish are not the same as humans, with marine mammals hearing over a wider range of frequencies, fish over a typically smaller range of frequencies and both with different sensitivities. It is therefore important to understand how an animal's hearing varies over the entire frequency range to assess the effects of sound on marine life. Consequently, use can be made of frequency weighting scales to determine the level of the sound in comparison with the auditory response of the animal concerned. A comparison between the typical hearing response curves for fish, humans and marine mammals is shown in Figure 8-2. Note that hearing thresholds are sometimes shown as audiograms with sound level on the y axis rather than sensitivity, resulting in the graph shape being the inverse of the graph shown. It is also worth noting that some fish are sensitive to particle velocity rather than pressure, although paucity of data relating to particle velocity levels for anthropogenic sound sources means that it is often not possible to quantify this effect. Marine reptiles (mostly sea turtles) have relatively poor hearing underwater, lacking a good acoustic coupling mechanism from the sea water to the inner ear.

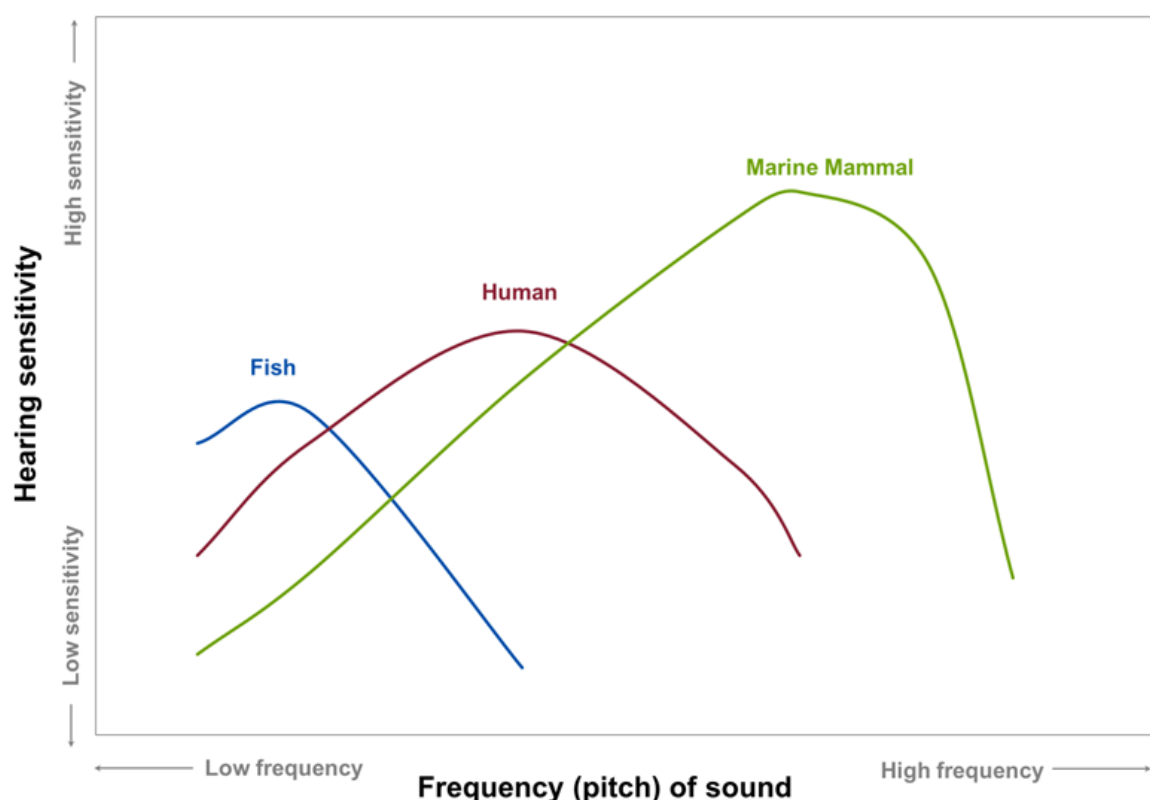


Figure 8-2: Comparison between hearing thresholds of different marine animals and humans.

Impulsiveness

The impulsiveness of a source can be estimated from the kurtosis of the weighted signal (as suggested by Matin et al. in “Techniques for distinguishing between impulsive and non-impulsive sound in the context of regulating sound exposure for marine mammals”, Journal of the Acoustical Society of America, 2020)

The consequence of this is that the same equipment can be both impulsive and non-impulsive, depending on marine mammal presence and the local environment.

Below is an example of a hull mounted echo sounder at 15 m depth and at 250 m depth.

Subsea Noise Technical Report

In shallow water the ping rate can be high as reflections from the sediment return quickly, but the single pulse duration is usually shorter as less energy in the signal is required due to the short range the pulse must travel. This leads to high repetition rate (decreases kurtosis) and shorter pulses (increases kurtosis). Figure 8-3 shows an example where this leads to a non-impulsive source, to be compared to the thresholds for non-impulsive noise.

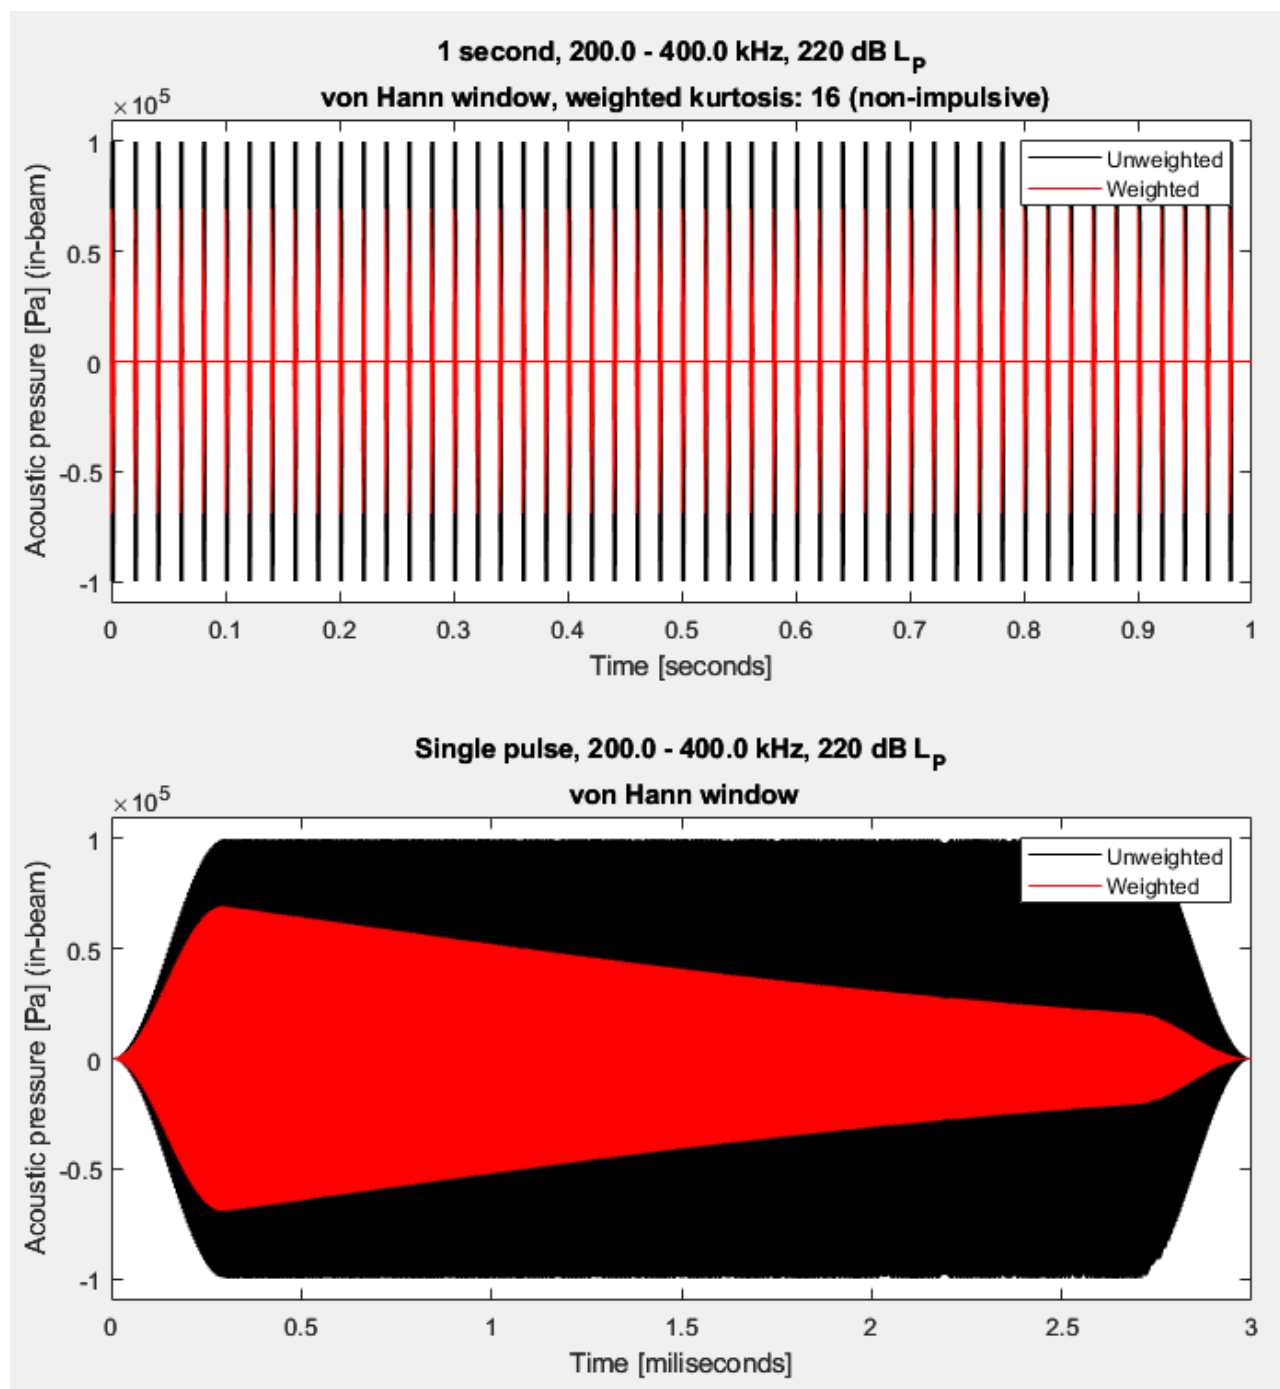


Figure 8-3. Example of a multibeam echosounder at 15 m depth (achieving 50 ping/sec) with a 3 ms ping duration. VHF-weighted kurtosis of 16 – non-impulsive.

In deeper water, the ping rate will usually be slower as echoes take longer to return to the sediment and the pulses will be longer to increase the energy in the pulses and make their echoes easier to detect. This leads to low repetition rate (increases kurtosis) and longer pulses (decreases kurtosis). Figure 8-4 shows an example where this combination resulted in an impulsive source, to be compared to the thresholds for impulsive noise.

Subsea Noise Technical Report

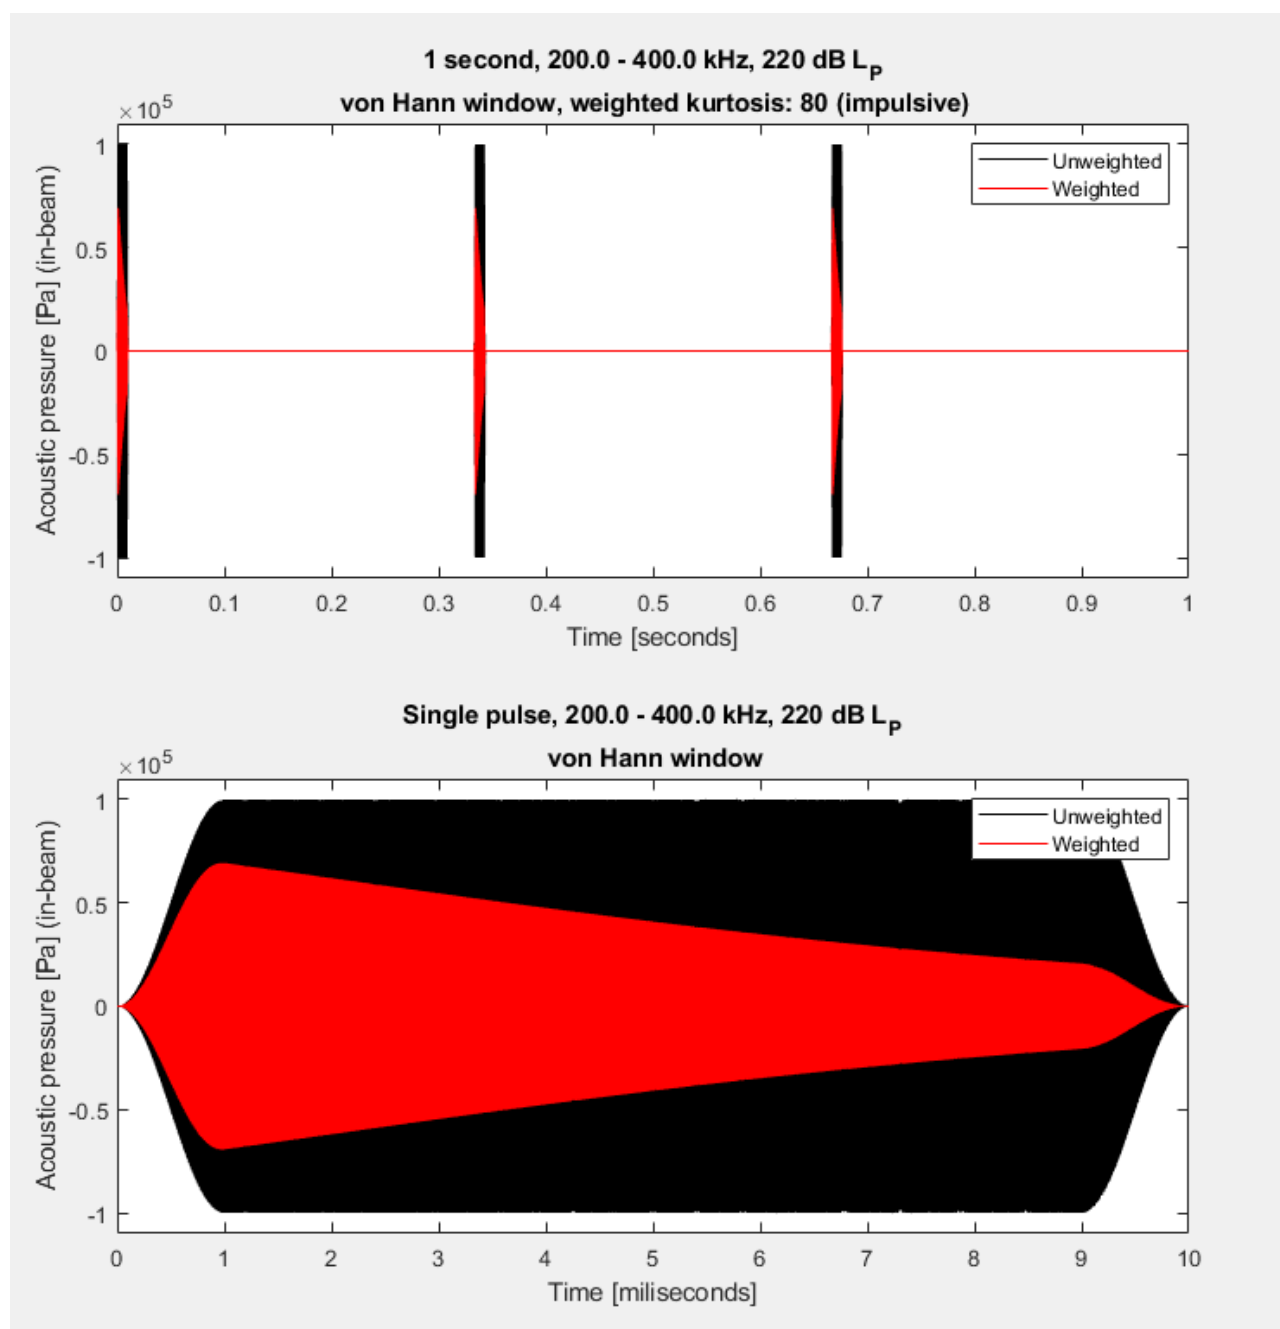


Figure 8-4. Example of a multibeam echosounder at 250 m depth (achieving 3 ping/sec) with a 10 ms ping duration. VHF-weighted kurtosis of 80 – impulsive.

With range, due to multiple reflections and scattering, the kurtosis will decrease with increased range, for shallow water this decrease will be quicker than for deeper water, compare Figure 8-5 & Figure 8-6, where a kurtosis <40 is reached at c. 200 m in 20 m depth, but at over 1000 m at 200 m depth.

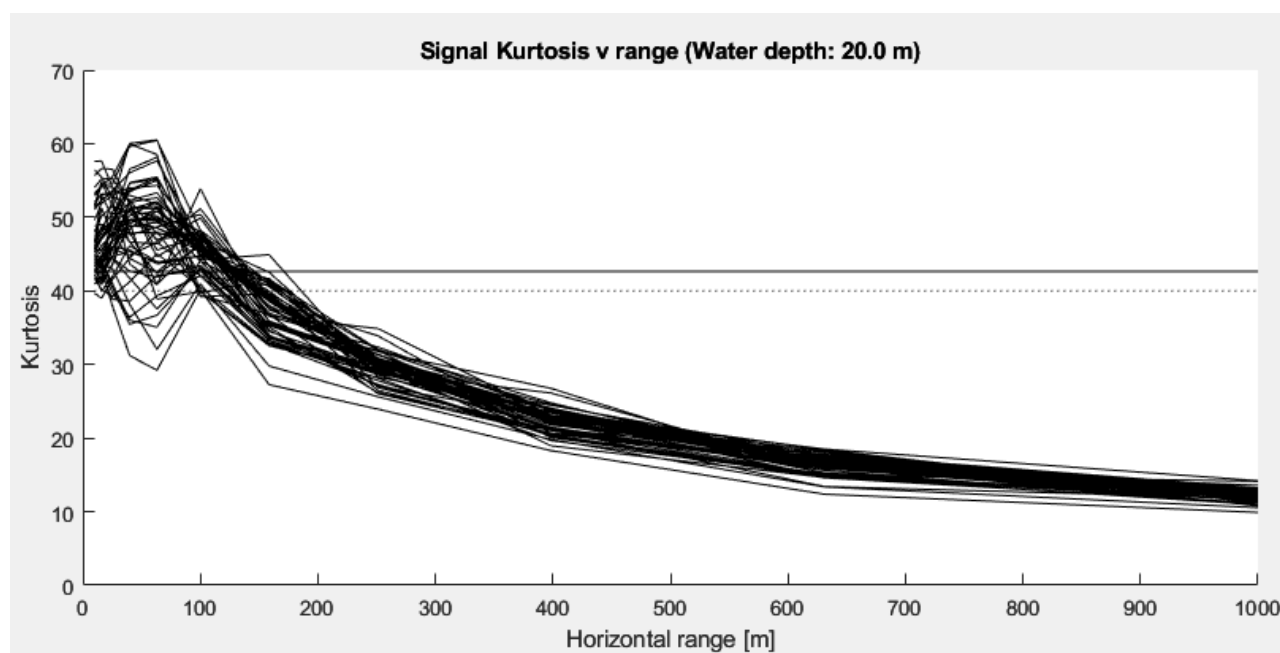


Figure 8-5. Example of USBL signal kurtosis decreasing with range at 20 m depth. Multiple lines are various combinations of source and receiver depths.

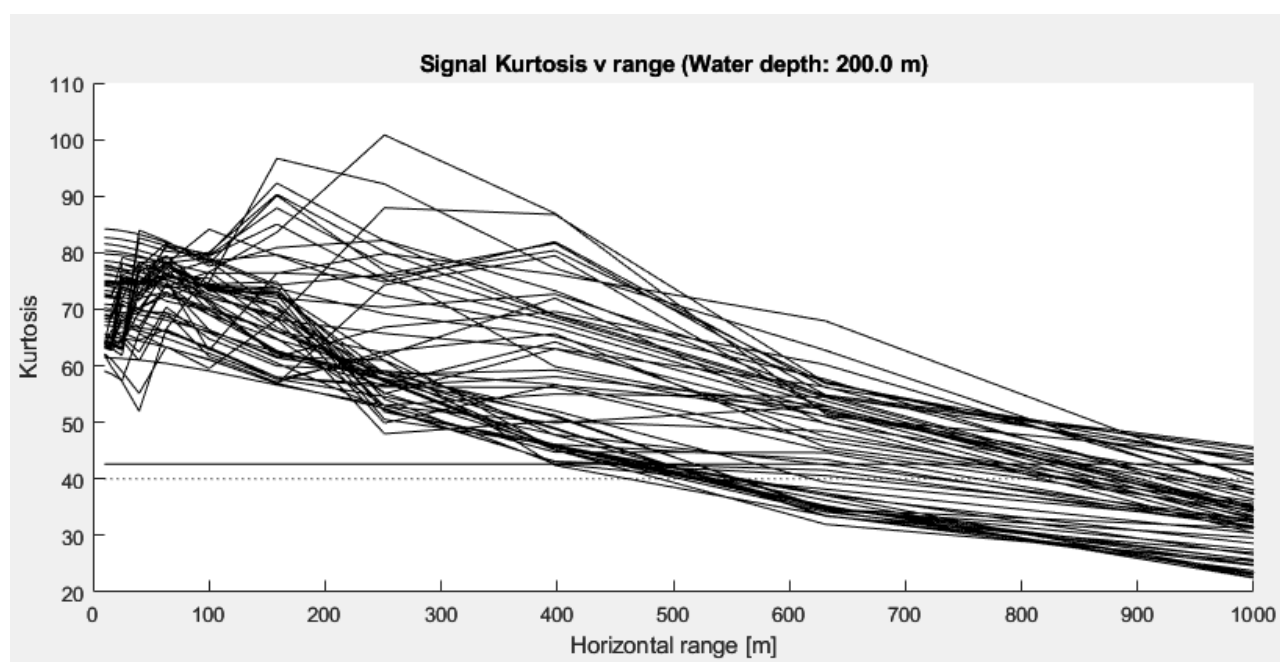


Figure 8-6. Example of USBL signal kurtosis decreasing with range at 200 m depth. Multiple lines are various combinations of source and receiver depths.

Review of Sound Propagation Concepts

Increasing the distance from the sound source usually results in the level of sound getting lower, due primarily to the spreading of the sound energy with distance, analogous to the way in which the ripples in a pond spread after a stone has been thrown in.

The way that the sound spreads will depend upon several factors such as water column depth, pressure, temperature gradients, salinity, as well as water surface and seabed conditions. Thus, even for a given locality, there are temporal variations to the way that sound will propagate. However, in simple terms, the

Subsea Noise Technical Report

sound energy may spread out in a spherical pattern (close to the source, with no boundaries) or a cylindrical pattern (much further from the source, bounded by the surface and the sediment), although other factors mean that decay in sound energy may be somewhere between these two simplistic cases.

In acoustically shallow waters¹¹ in particular, the propagation mechanism is coloured by multiple interactions with the seabed and the water surface (Lurton, 2002; Etter, 2013; Urick, 1983; Brekhovskikh and Lysanov 2003, Kinsler et al., 1999). Whereas in deeper waters, the sound will propagate further without encountering the surface or bottom of the sea, in shallower waters the sound is reflected many times by the surface and sediment.

At the sea surface, the majority of sound is reflected back into the water due to the difference in acoustic impedance (i.e. sound speed and density) between air and water. However, scattering of sound at the surface of the sea is an important factor with respect to the propagation of sound from a source. In an ideal case (i.e. for a perfectly smooth sea surface), the majority of sound wave energy will be reflected back into the sea. However, for rough waters, much of the sound energy is scattered (Eckart, 1953; Fortuin, 1970; Marsh, Schulkin, and Kneale, 1961; Urick and Hoover, 1956). Scattering can also occur due to bubbles near the surface such as those generated by wind or fish or due to suspended solids in the water such as particulates and marine life. Scattering is more pronounced for higher frequencies than for low frequencies and is dependent on the sea state (i.e. wave height). However, the various factors affecting this mechanism are complex. Generally, the scattering effect at a particular frequency depends on the physical size of the roughness in relation to the wavelength of the frequency of interest.

As surface scattering results in differences in reflected sound, its effect will be more important at longer ranges from the source sound and in acoustically shallow water (i.e. where there are multiple reflections between the source and receiver). The degree of scattering will depend upon the water surface smoothness/wind speed, water depth, frequency of the sound, temperature gradient, grazing angle and range from source. Depending upon variations in the aforementioned factors, significant scattering could occur at sea state 3 or more for higher frequencies (e.g. 15 kHz or more). It should be noted that variations in propagation due to scattering will vary temporally (primarily due to different sea-states/wind speeds at different times) and that more sheltered areas (which are more likely to experience calmer waters) could experience surface scattering to a lesser extent, and less frequently, than less sheltered areas which are likely to encounter rougher waters. However, over shorter ranges (e.g. within 10-20 times the water depth) the sound will experience fewer reflections and so the effect of scattering should not be significant. Consequently, over the likely distances over which injury will occur, this effect is unlikely to significantly affect the injury ranges presented in this report, and not including this effect will overestimate the impact.

When sound waves encounter the seabed, the amount of sound reflected will depend on the geoacoustic properties of the seabed (e.g. grain size, porosity, density, sound speed, absorption coefficient and roughness) as well as the grazing angle (see Figure 8-7¹²) and frequency of the sound (Cole, 1965; Hamilton, 1970; Mackenzie, 1960; McKinney and Anderson, 1964; Etter, 2013; Lurton, 2002; Urick, 1983). Thus, seabeds comprising primarily of mud or other acoustically soft sediment will reflect less sound than acoustically harder seabeds such as rock or sand. This effect also depends on the profile of the seabed (e.g. the depth of the sediment layers and how the geoacoustic properties vary with depth below the sea floor). The sediment interaction is less pronounced at higher frequencies (a few kHz and above) where interaction is primarily with the top few cm of the sediment (related to the wavelength). A scattering effect (similar to that which occurs at the surface) also occurs at the seabed (Essen, 1994; Greaves and Stephen, 2003; McKinney and Anderson, 1964; Kuo, 1992), particularly on rough substrates (e.g. pebbles and larger).

¹¹ Acoustically, shallow water conditions exist whenever the propagation is characterised by multiple reflections with both the sea surface and seabed (Etter, 2013). Consequently, the depth at which water can be classified as acoustically deep or shallow depends upon numerous factors including the sound speed gradient, water depth, sediment type, frequency of the sound and distance between the source and receiver.

¹² The density of “rays” indicate difference in effective propagation angle from the source, with acoustically harder sediments (gravel) having better reflection at steeper angles leading to more “rays” being effectively propagated (no significant bottom attenuation) in the waveguide. Beam shape indicated in left chart, with the black line showing the same received level.

Subsea Noise Technical Report

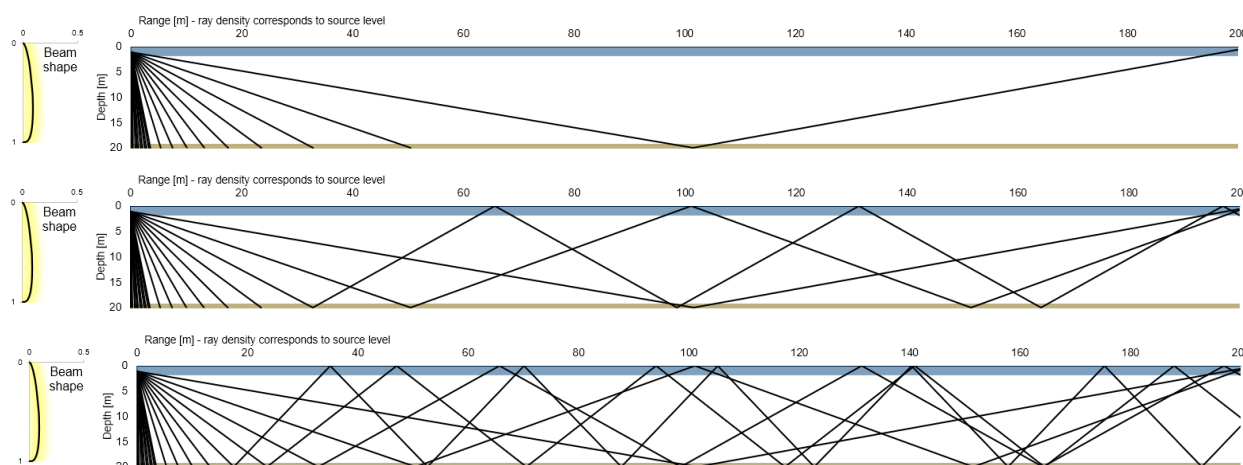


Figure 8-7: Schematic of the effect of sediment on sources with narrow beams. Sediments range from fine silt (top panel), sand (middle panel), and gravel (lower panel).

These sediment effects mean that the directivity of equipment such as sub-bottom profilers have a profound effect on the effective source level – the apparent source level to a far-away receiver.

A parametric SBP such as the “Innomar Medium” or “Standard” sub-bottom profiler use two higher frequencies (“primary frequencies”) to generate an interference pattern at lower frequencies (“secondary frequencies”). This means that the secondary beam can be made extraordinarily narrow, e.g. 5 degrees at -10 dB (Figure 8-8), versus c. 50 degrees for a chirper/pinger type, leading to a much smaller sound impact – even when a parametric sub-bottom profiler has higher sound output within the main beam. We account for these differences in beam pattern by including the sediment reflection loss at high incidence angles (Figure 8-7) to reduce the effective source level accordingly.

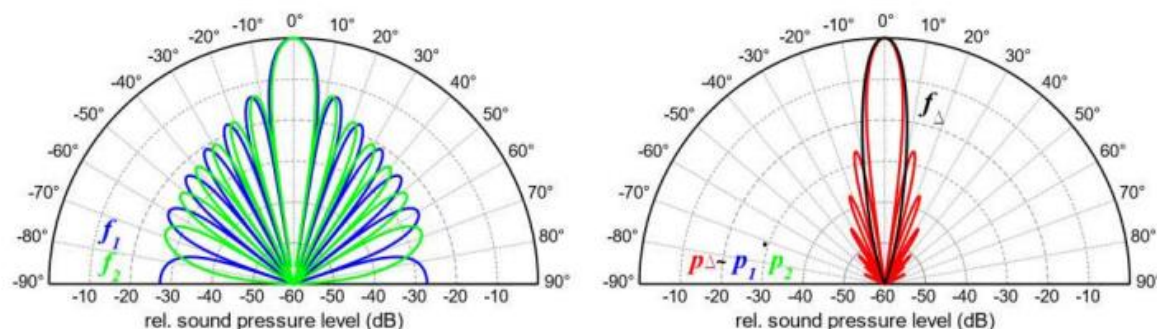


Figure 8-8. Example of a beam pattern on an Innomar SES 2000. Primary frequencies left (f_1 & f_2), the interference pattern between the primary frequencies means that the beam pattern for the secondary frequency (right plot) is very narrow (Source: Innomar technical note TN-01).

Another phenomenon is the waveguide effect which means that shallow water columns do not allow the propagation of low frequency sound (Urlick, 1983; Etter, 2013). The cut-off frequency of the lowest mode in a channel can be calculated based on the water depth and knowledge of the sediment geoaoustic properties. Any sound below this frequency will not propagate far due to energy losses through multiple reflections. The cut-off frequency as a function of water depth is shown in Figure 8-9 for a range of seabed types. Thus, for a water depth of 10m (i.e. shallow waters typical of coastal areas and estuaries) the cut-off frequency would be approximately 70Hz for sand, 115Hz for silt, 155Hz for clay and 10Hz for bedrock.

Subsea Noise Technical Report

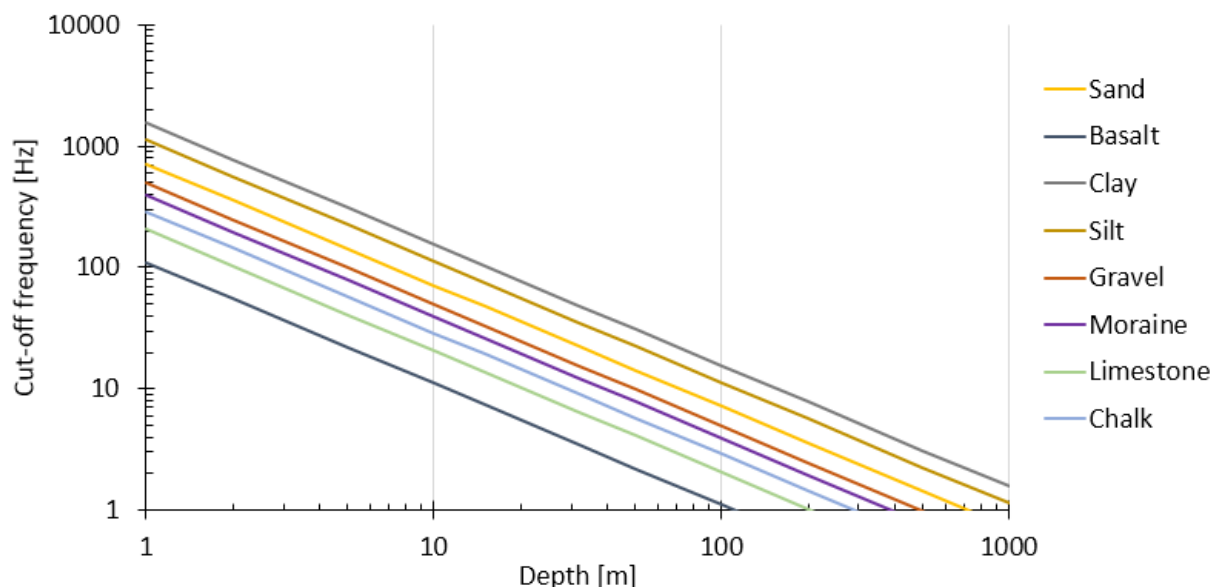


Figure 8-9: Lower cut-off frequency as a function of depth for a range of seabed types.

Changes in the water temperature and the hydrostatic pressure with depth mean that the speed of sound varies throughout the water column. This can lead to significant variations in sound propagation and can also lead to sound channels, particularly for high-frequency sound. Sound can propagate in a duct-like manner within these channels, effectively focussing the sound, and conversely, they can also lead to shadow zones. The frequency at which this occurs depends on the characteristics of the sound channel but, for example, a 25m thick layer would not act as a duct for frequencies below 1.5 kHz. The temperature gradient can vary throughout the year and thus there will be potential variation in sound propagation depending on the season.

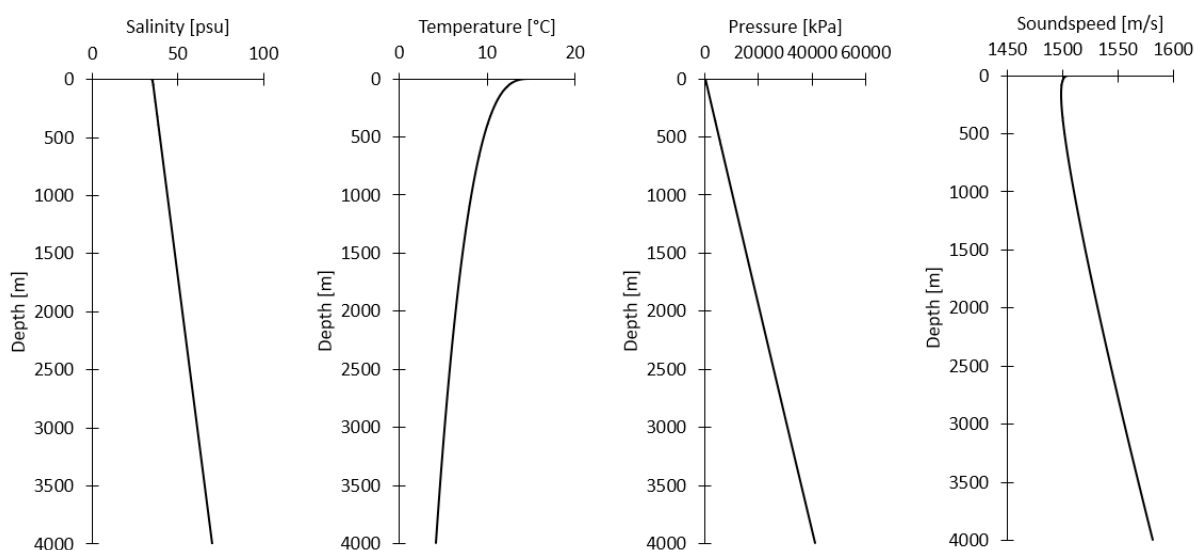


Figure 8-10: Soundspeed profile as a function of salinity, temperature and pressure.

Wind can make a significant difference to the soundspeed in the uppermost layers as the introductions of bubbles decreases the soundspeed and refracts (bends) the sound towards the surface, where the increased roughness and bubbles from the wind will cause increased transmission loss.

Subsea Noise Technical Report

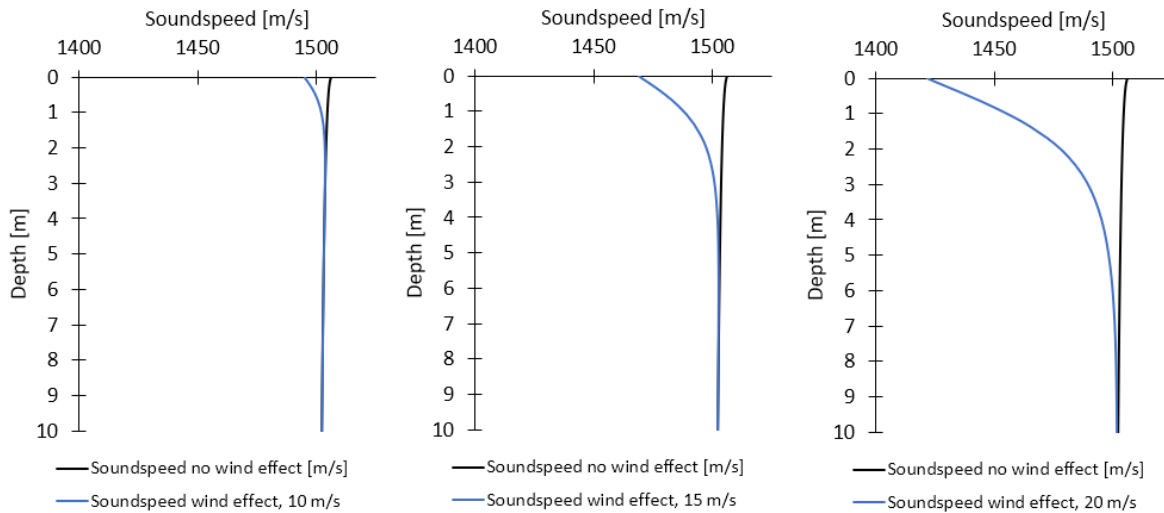


Figure 8-11: Effect of wind (at 10 m height) on upper portion of soundspeed profile.

Sound energy can also be absorbed due to interactions at the molecular level converting the acoustic energy into heat. This is another frequency dependent effect with higher frequencies experiencing much higher losses than lower frequencies. This is shown in Figure 8-12 where the variation of the absorption (sometimes called volume attenuation) is shown for various salinities and temperatures. As the effect is proportional to the wavelength, colder water, with slower soundspeed/period and being slightly more viscous, will have more absorption. Higher salinity slightly decreases absorption at low frequencies (mostly due to increase in soundspeed and wavelength/period), but much higher absorption at higher frequencies where interaction with pressure sensitive molecules of magnesium sulphite and boric acid increase the conversion acoustic energy to heat.

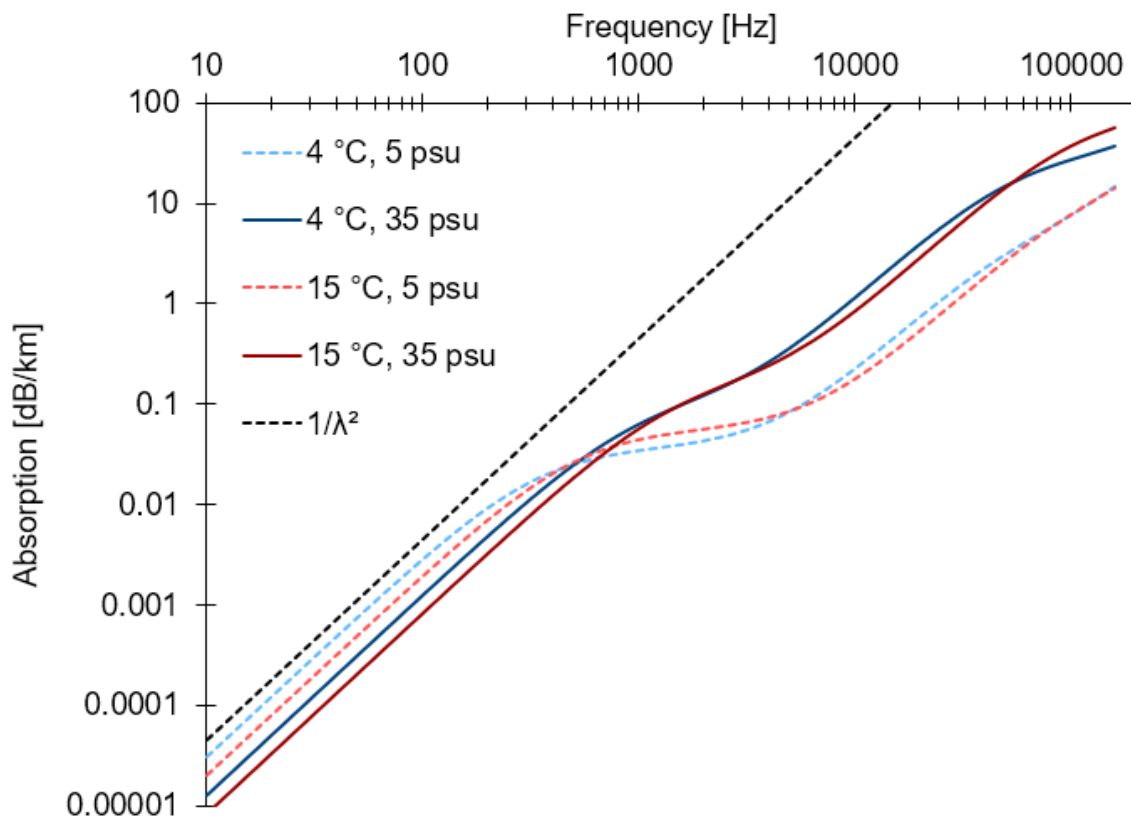


Figure 8-12: Absorption loss coefficient (dB/km) for various salinities and temperature.